

Main Menu

FPS

Basic

8 – 300 fps

24 fps

Advanced

1 – 303 fps +

23.976 fps

dependent on Resolution & REDCODE settings

ISO

250 – 12800

ISO 800

F-Stop

Available with RED
EPIC Canon EOS
Mount

Basic

Allows adjustment of the aperture,
range depends on attached lens

Advanced

Aperture

Enter F-stop directly

Focus

Enter focal distance directly,
range depends on attached lens

1/SEC (Exposure)

Basic

1 sec – 1/8000 sec

1/48 sec

Advanced

Exposure (Speed)

1/48 sec

1 – 1/8000 sec +

Integration Time

20.833 ms

0.125 – 1000 ms +

Angle*

Absolute Angle 180.000 deg

–1.000–360.000 deg +

* “Relative“ or „Absolute“
dependent on shutter mode

White Balance

Basic

1700 – 10000 K

Advanced

Preset

Daylight

Incandescent (2800K)

Tungsten (3200K)

Flourescent (4500K)

Flash (5500K)

Daylight (5600K)

Cloudy (7500K)

Shade (9000K)

Apply Preset

Color Temp.

5600 K

1700 – 10000K +

Tint

0

–100.000 – 100.000 +

Calc White Balance

Resolution

5K

5K 2:1

5K WS

5K Ana

4K

4K HD

3K

2K

2K WS

REDCODE

3:1 – 18:1

8:1

dependent on Resolution & fps



RED EPIC
MENU GUIDE

OCTAMAS

Menu Guide OCTAMAS AG Switzerland
mail@octamas.com +41 44 401 58 00
www.octamas.com

LEGEND

Lorem ipsum



Are default values

Playback



Exit Playback



Touch this menu icon to enter the
Secondary Menus / to return to settings menu
Touch and hold to lock the touchscreen

Advanced

Touch and hold or double-click on an icon
to bring up an advanced interface display



Keypad for entering information directly



Keyboard for entering information directly



Slider to adjust levels



Touch and hold to unlock the touchscreen

Secondary Menus 1/8

HDR

Off

HDRx

Stops

1 – 6

Available with RED
EPIC Canon EOS Mount

Focus

Mode

Manual

Manual

Confirm

Single

Continuous

Touch Track

Rack

Zones

Spot

Center

Spot

Exposure

Not Implemented at this time

Presets

Preset

alt_keys (FACTORY)

def_keys (FACTORY)

User defined presets

Apply

Delete...

Yes

No

Create...

New Name

☒ Image

unchecked

☒ Project

unchecked

☒ Output

unchecked

☒ System

unchecked

☒ Keys

unchecked

Create

Import/Export...

Camera Presets

alt_keys (FACTORY)

def_keys (FACTORY)

User defined presets

Export Preset

Disk Presets

User defined presets

Import

RMD Preset

User defined presets

Apply

Yes

No

Select Media

Set...

S-SSD

Reel No

+

1 – 999

Cam ID

▲

A – Z

Cam Pos

▲

right

center

left

Set

Format Media...

Reel No

+

1 – 999

Cam ID

▲

A – Z

Cam Pos

▲

right

center

left

Format

Eject Media

Utils...

Secure Format...

Reel No

+

1 – 999

Cam ID

▲

A – Z

Cam Pos

▲

right

center

left

Secure Format

Media

Settings

Settings see next pages

Power

Shutdown



RED EPIC
MENU GUIDE

OCTAMAS

Menu Guide OCTAMAS AG Switzerland
mail@octamas.com +41 44 401 58 00
www.octamas.com

Secondary Menus 2/8

Settings

Display



v2.0.8
SVN 43576
BETA


RED EPIC
MENU GUIDE


OCTAMAS

Menu Guide OCTAMAS AG Switzerland
mail@octamas.com +41 44 401 58 00
www.octamas.com

Settings

Display

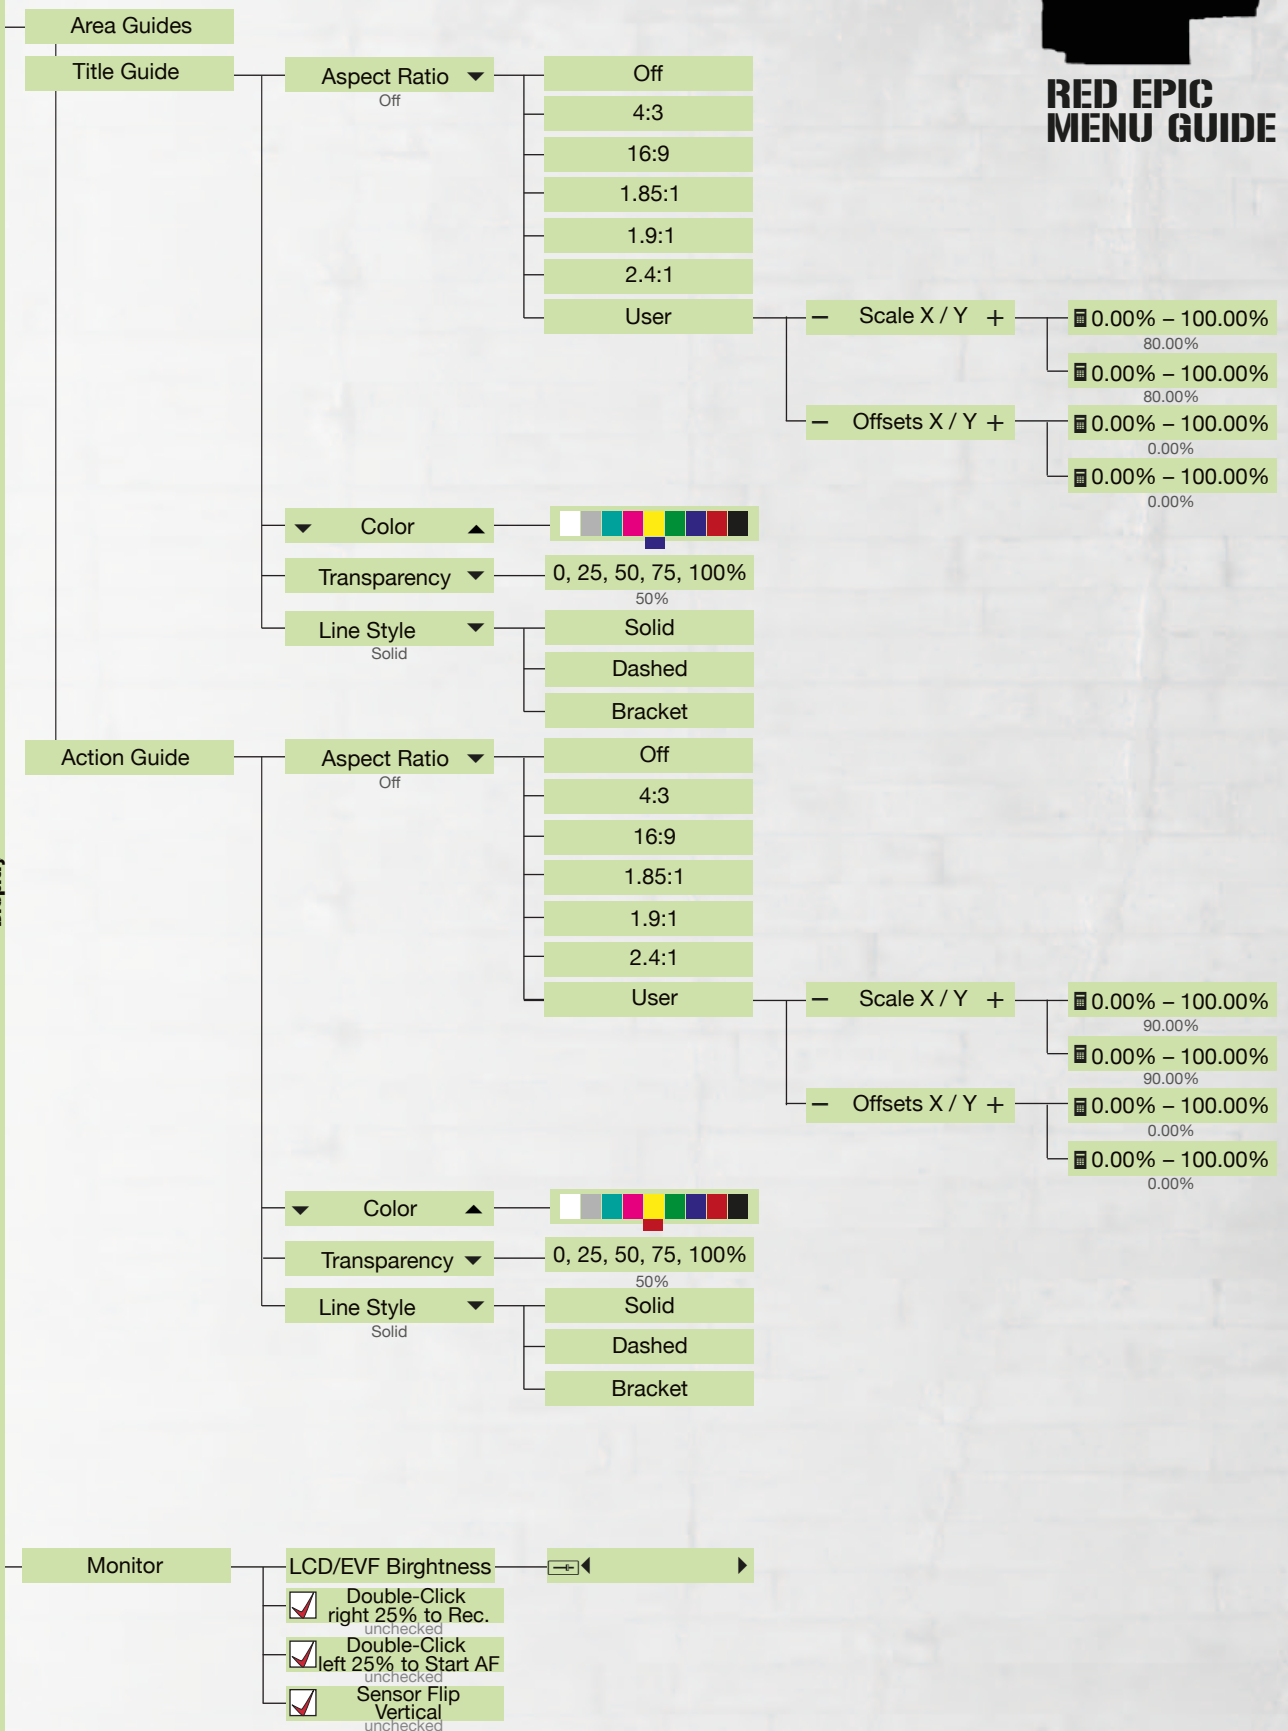

v2.0.8
SVN 43576
BETA

RED EPIC
MENU GUIDE



OCTAMAS

Menu Guide OCTAMAS AG Switzerland
mail@octamas.com +41 44 401 58 00
www.octamas.com

Secondary Menus 4/8

Settings


Look

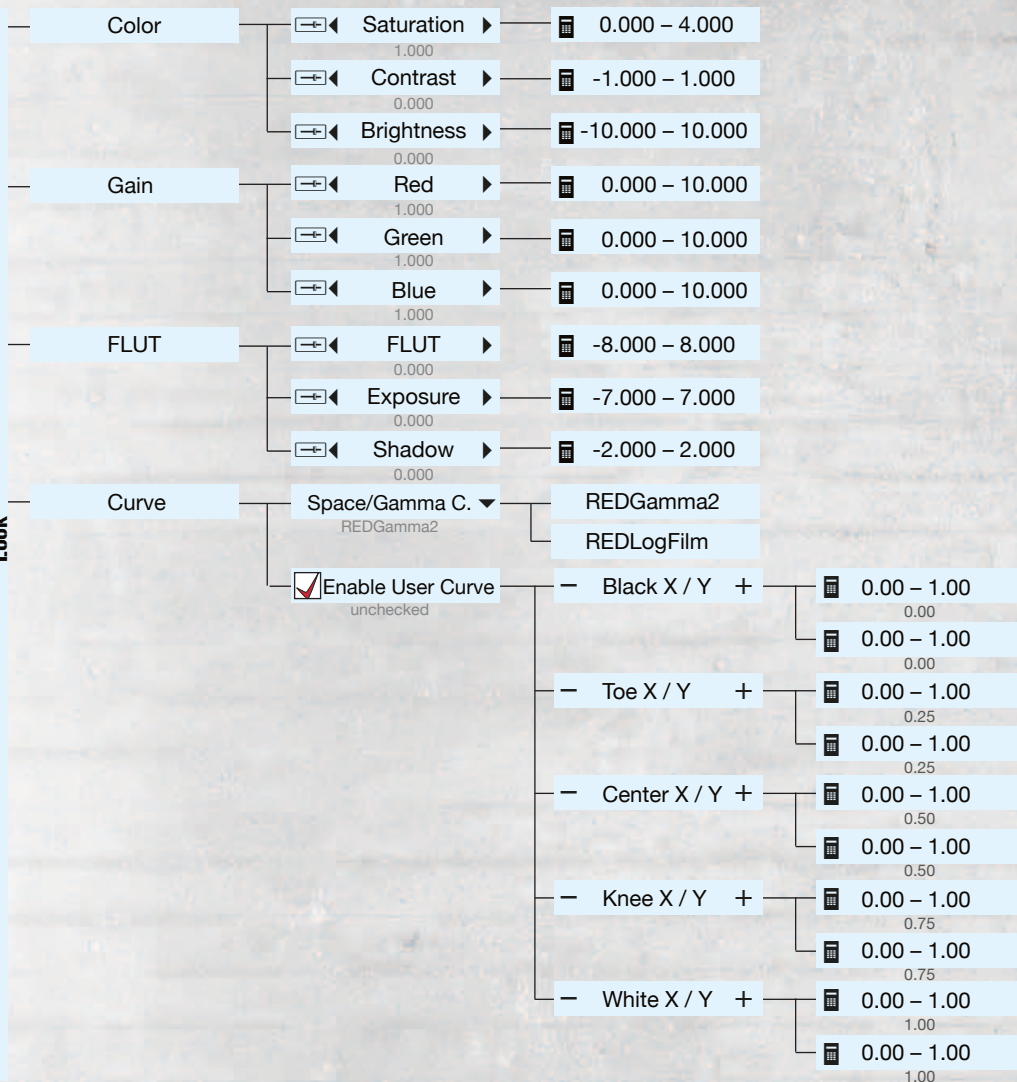

v2.0.8
SVN 43576
BETA

RED EPIC
MENU GUIDE

Project

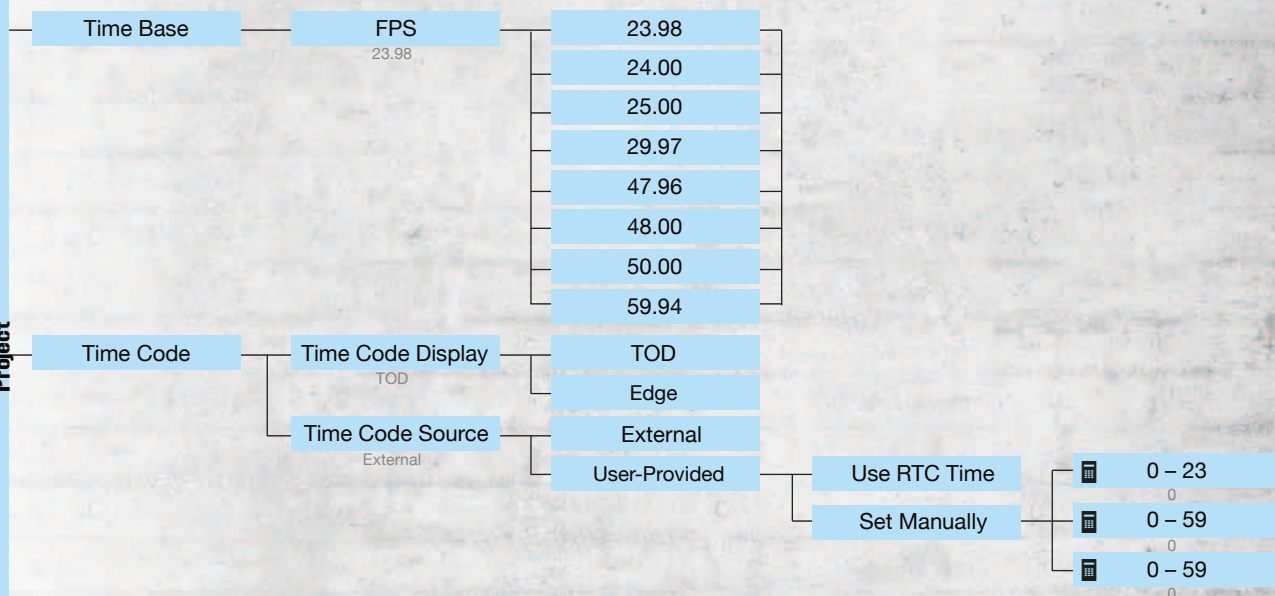



OCTAMAS

Menu Guide OCTAMAS AG Switzerland
mail@octamas.com +41 44 401 58 00
www.octamas.com

Settings

Audio / Video

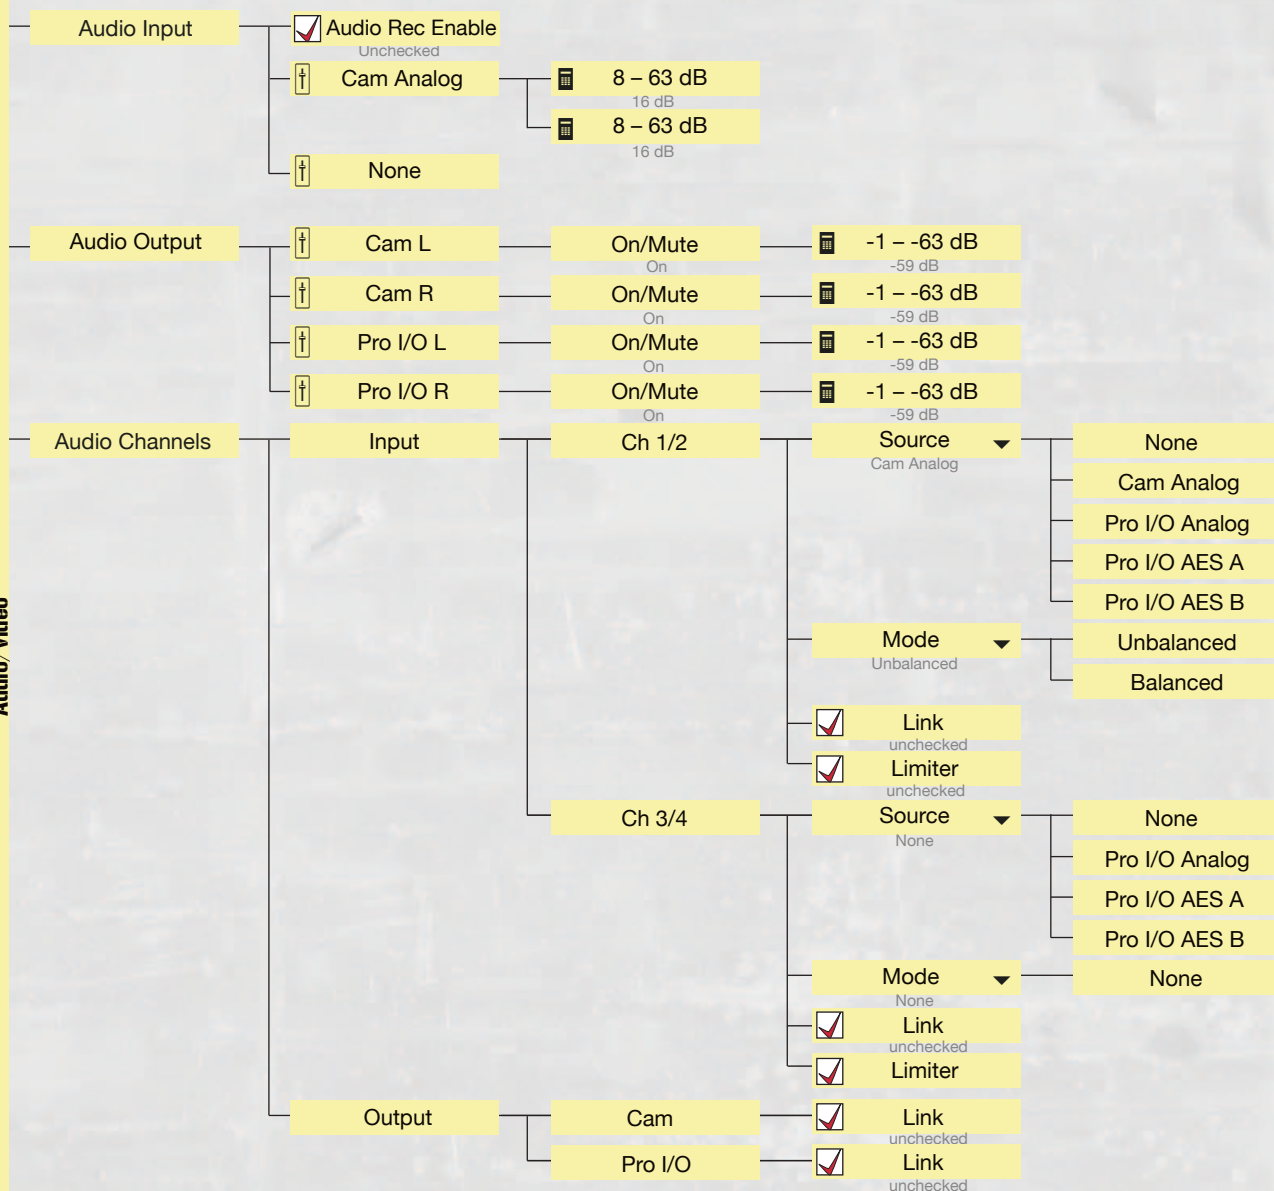

Secondary Menus 6/8


Settings

Audio / Video



☒ Automatically assign menu screen if enabled
unchecked

- Turning monitors ON/OFF or changing resolution requires a restart
- HDSDI and HDMI cannot be enabled at the same time
- Double-tapping on the touch LCD will re-enable the menus
- Settings will be applied when the dialog is closed



v2.0.8
SVN 43576
BETA

RED EPIC
MENU GUIDE

 **OCTAMAS**

Menu Guide OCTAMAS AG Switzerland
mail@octamas.com +41 44 401 58 00
www.octamas.com

Secondary Menus 7/8

Settings

Setup

Keys/Shortcuts	Key Source	▼	brain	Use this menu to select and program the camera user keys (operation guide p. 109-112)	
	User Key	▼	Brain GPI In Hight		
	Key Action		Record Start	Available actions see operation guide p. 112	
	☒ MENU key returns to settings menu		checked		
Date/Time	Date		Month	▲	Jan – Dec
			Day	+	1 – 31
			Year	+	2010 – 2020
	Time		Hour	+	0 – 24
			Minute	+	0 – 59
			Second	+	0 – 59
Communication	Name				
	Group				
	Target				All
					None
	Serial Protocol	▼	None		
			Element Technica		
			3ality SPC 7100		
			3ality SPC 7000		
			RCP 3D Metadata		
	Network		☒ DHCP	unchecked	
			☒ C2C	checked	
			☒ EXT	checked	
			IP Address		0 – 255 . 0 – 255 . 0 – 255 . 0 – 255
			Netmask		0 – 255 . 0 – 255 . 0 – 255 . 0 – 255
			Gateway		0 – 255 . 0 – 255 . 0 – 255 . 0 – 255
	REDmote	Scan for REDmotes	▼		Pair REDmote
		Currently paired:			
		Unpair REDmote			
	☒ Man. Ch Select	checked	0 – 15		
	GPIO/Sync	Camera Input	▼	Sync In	Off
			General Purpose In		Genlock
		Camera Output	▼	Sync Out	Shutter
			General Purpose Out		Internal
		Sync Mode	▼	Off	Proxy
					Slave
	System	Fan Control		Fan Control	▼
			Auto		Manual
			Rec Speed	+	35 – 100%
			Stby Speed	+	45 – 100%
		Indicators		Beep Speaker	▼
			☒ EVF Tally Light	unchecked	Off
					Record/Stop

v2.0.8
SVN 43576
BETA

RED EPIC
MENU GUIDE


OCTAMAS

Menu Guide OCTAMAS AG Switzerland
mail@octamas.com +41 44 401 58 00
www.octamas.com

Secondary Menus 8/8




RED EPIC MENU GUIDE

Settings

Maintenance

Playback

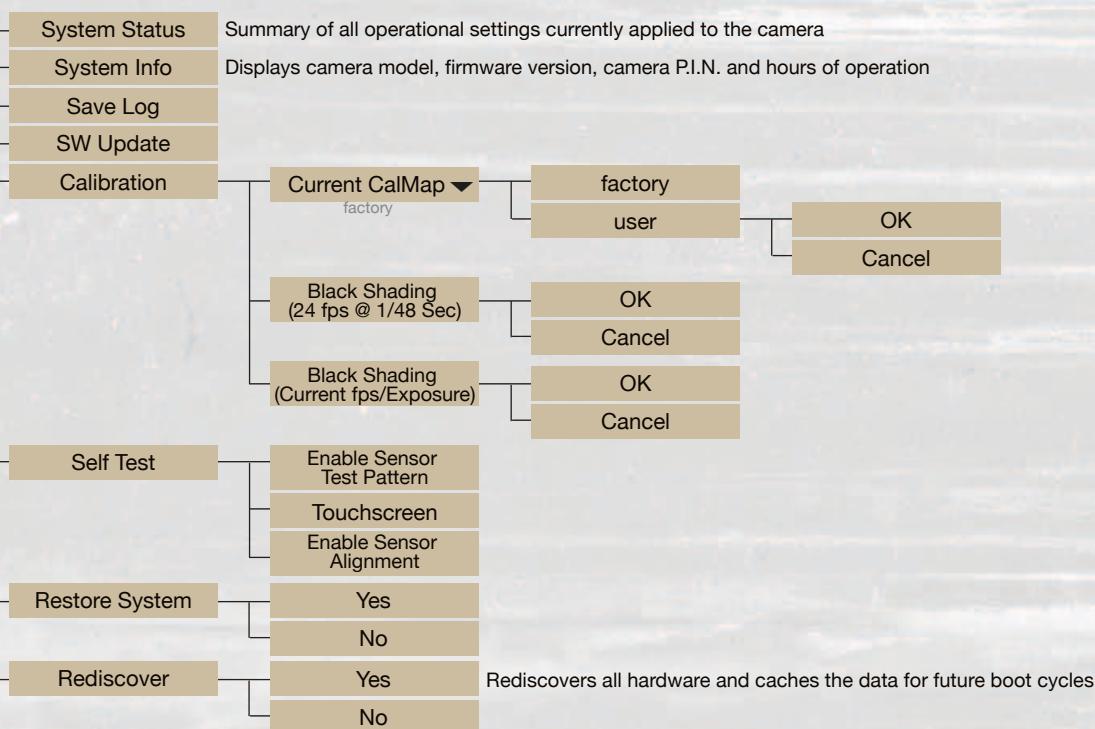

Allows you to view clips and also allows you to change the look of the playback clips, see operation guide p. 132 - 140

LEGEND

- ▶ Playback
- Exit Playback
- x1 Playback Speed
- ⋮ In Point Marker
- ◀ Frame-by-frame reverse
- ▶ / || Play / Pause
- ▶ Frame-by-frame forward
- ⋮ Out Point Marker
- / ↺ Play once / Loop
- / ← Playback direction

OCTAMAS

Menu Guide OCTAMAS AG Switzerland
mail@octamas.com +41 44 401 58 00
www.octamas.com