

Main Menu

FPS

Basic

12 – 300 fps

24 fps

Advanced

1 – 300 fps +

23.976 fps

dependent on Resolution & REDCODE settings

ISO

250 – 12800

ISO 800

F-Stop

Not implemented at this time

1/SEC (Exposure)

Basic

1 sec – 1/8000 sec

1/48 sec

Advanced

Exposure (Speed)

1 – 1/8000 sec +

1/48 sec

Integration Time

0.125 – 1000 ms +

20.833 ms

Angle*

–4.000–360.000 deg+

Relative Angle 180.000 deg

* “Relative“ or „Absolute“ dependent on shutter mode

White Balance

Basic

1700 – 10000 K

Advanced

Preset

Daylight

Shade (9000K)

Cloudy (7500K)

Daylight (5600K)

Flash (5500K)

Flourescent (4500K)

Tungsten (3200K)

Incandecent (2800K)

Apply

Color Temp.

5600 K

– 1700 – 10000 K+

Tint

0

– 30 – 30 +

Calc White Balance

Resolution

5K 2:1

5K 2:1

5K FF

5K 2.4:1

5K Ana

4K HD

2K 2.4:1

REDCODE

3:1 – 18:1

8:1

dependent on Resolution & fps



RED EPIC
MENU GUIDE

OCTAMAS

Menu Guide OCTAMAS AG Switzerland

mail@octamas.com +41 44 401 58 00

www.octamas.com

LEGEND

Lorem ipsum



Are default values

Touch this menu icon to enter the Secondary Menus

Advanced

Touch and hold or double-click on an icon to bring up an advanced interface display



Keypad for entering information directly



Keyboard for entering information directly



Slider to adjust levels

HDR

Off

HDRx

Stops

1 – 6

2

Focus

Mode

Manual

Manual

Confirm

Zones

Center

Center

Spot

Matrix

Exposure

Not Implemented at this time

Presets

Preset

alt_keys (FACTORY)

def_keys (FACTORY)

User defined presets

Apply

Delete...

Create...



New Name



Image

unchecked



Project

unchecked



Output

unchecked



System

unchecked



Keys

unchecked

Create

Import/Export...

Camera Presets

alt_keys (FACTORY)

def_keys (FACTORY)

User defined presets

Export Preset

Disk Presets

User defined presets

Import

RMD Preset

User defined presets

Apply

Media

Select Media

S-SSD

Set Media...



Reel No

1 – 999

Cam ID

A – Z

Cam Pos

center

right

center

left

Set

Format Media...

S-SSD



Reel No

1 – 999

Cam ID

A – Z

Cam Pos

center

right

center

left

Format

Eject Media

Settings

Settings see next pages

Power

Shutdown




RED EPIC
MENU GUIDE

OCTAMAS

Menu Guide OCTAMAS AG Switzerland
mail@octamas.com +41 44 401 58 00
www.octamas.com

Settings

Display

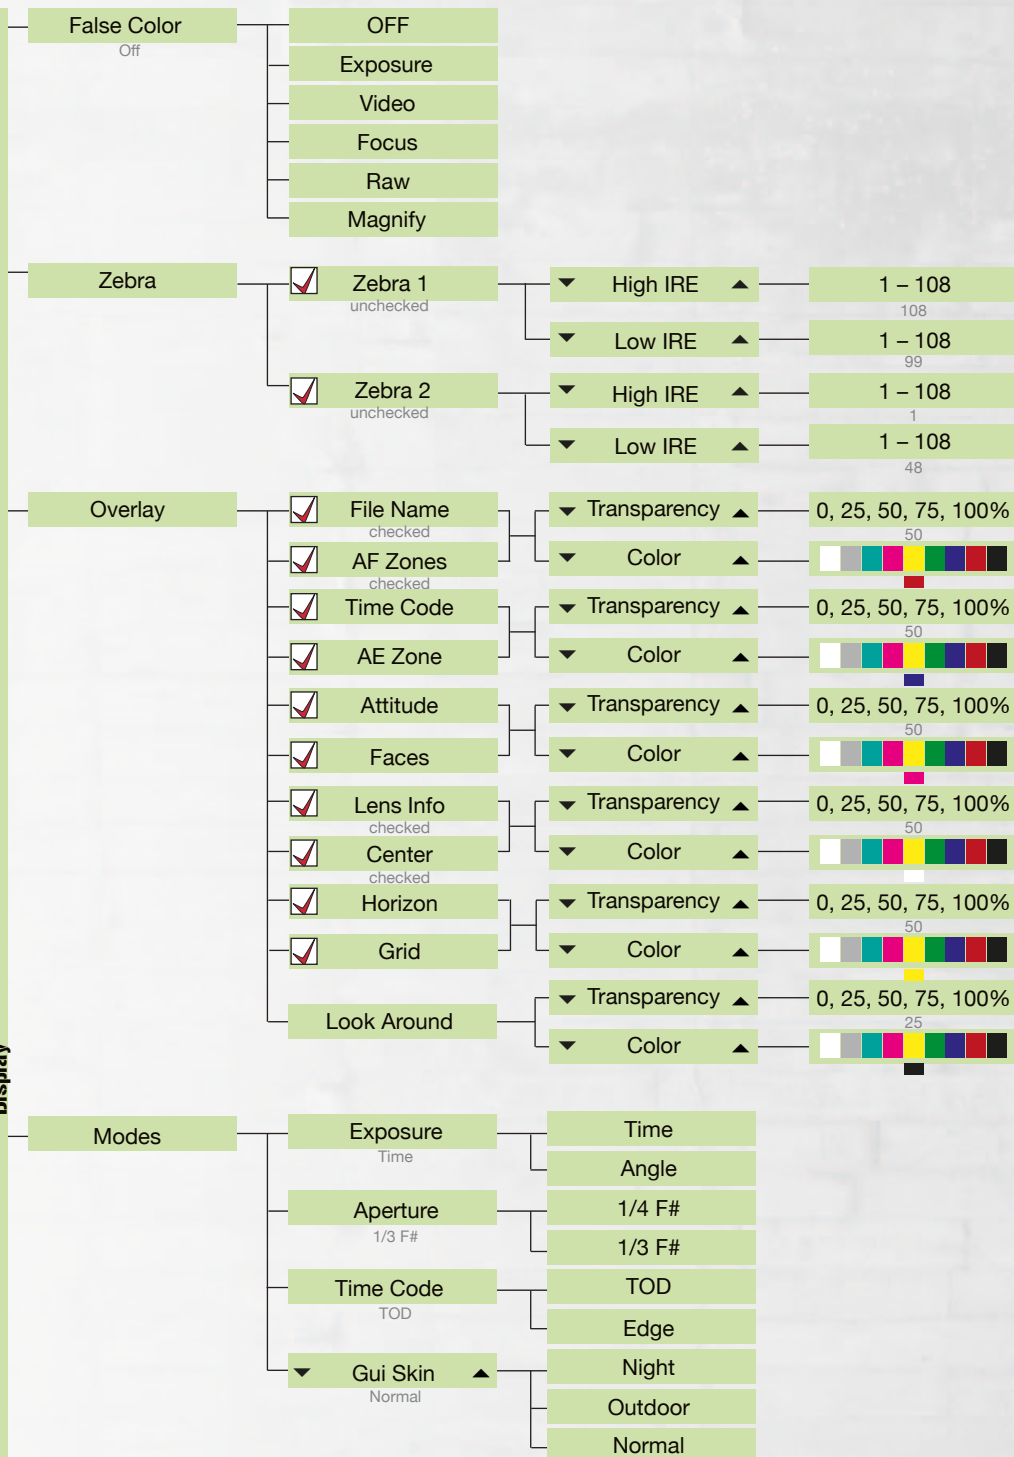

v1.6.32
SVN 38889
BETA

RED EPIC
MENU GUIDE


OCTAMAS

Menu Guide OCTAMAS AG Switzerland
mail@octamas.com +41 44 401 58 00
www.octamas.com

Settings

Display

Frame Guide

Size Full

- Off
- Full
- 4:3
- 16:9
- 1.85:1
- 1.9:1
- 2.4:1
- User

Color

Transparency 0, 25, 50, 75, 100%
50%

Aspect Ratio + 1.00 – 10.00
2.40

Scale X / Y + 0% – 100%
100.00%

Offsets X / Y + 0% – 100%
0.00%

Area Guides

Title Guide

Aspect Ratio Off

- Off
- Full
- 4:3
- 16:9
- 1.85:1
- 1.9:1
- 2.4:1
- User

Color

Transparency 0, 25, 50, 75, 100%
50%

Scale X + 0% – 100%
80.00%

Scale Y + 0% – 100%
80.00%

Action Guide

Aspect Ratio Off

- Off
- Full
- 4:3
- 16:9
- 1.85:1
- 1.9:1
- 2.4:1
- User

Color

Transparency 0, 25, 50, 75, 100%
50%

Scale X + 0% – 100%
90.00%

Scale Y + 0% – 100%
90.00%

Monitor

Birghtness Control LCD/EVF

Touch Gestures

- ☒ Pinch to Magnify unchecked
- ☒ Double-Click unchecked
right 25% to Rec.

v1.6.32
SVN 38889
BETA

RED EPIC
MENU GUIDE


OCTAMAS

Menu Guide OCTAMAS AG Switzerland
mail@octamas.com +41 44 401 58 00
www.octamas.com


Secondary Menus 4/5

Settings



Look

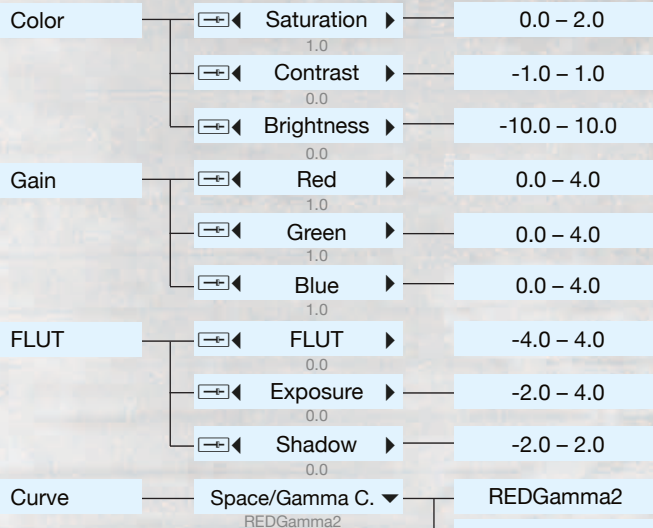


Sensor

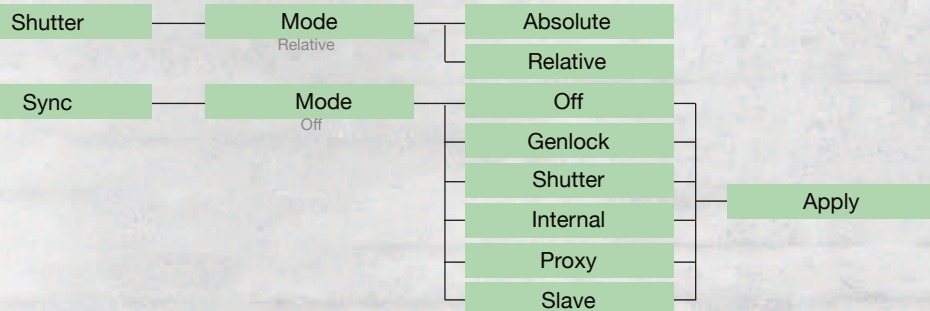



Project

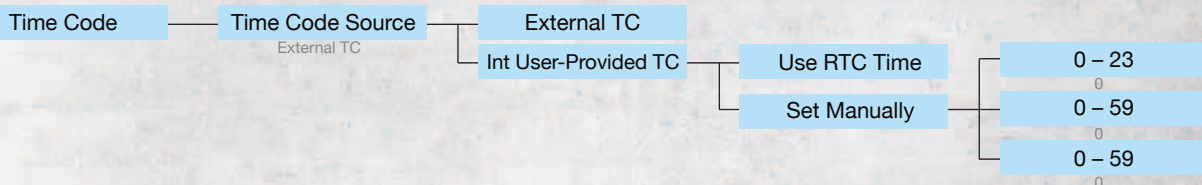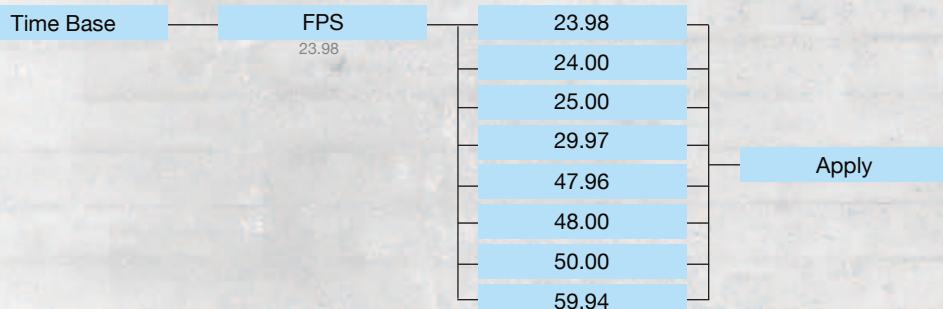

Modes



Audio/Video

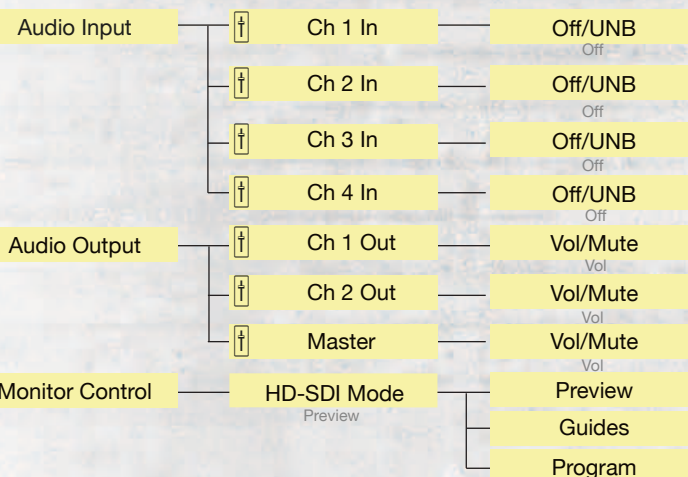

v1.6.32
SVN 38889
BETA

RED EPIC
MENU GUIDE


OCTAMAS

Menu Guide OCTAMAS AG Switzerland
mail@octamas.com +41 44 401 58 00
www.octamas.com

Secondary Menus 5/5

Settings


Setup

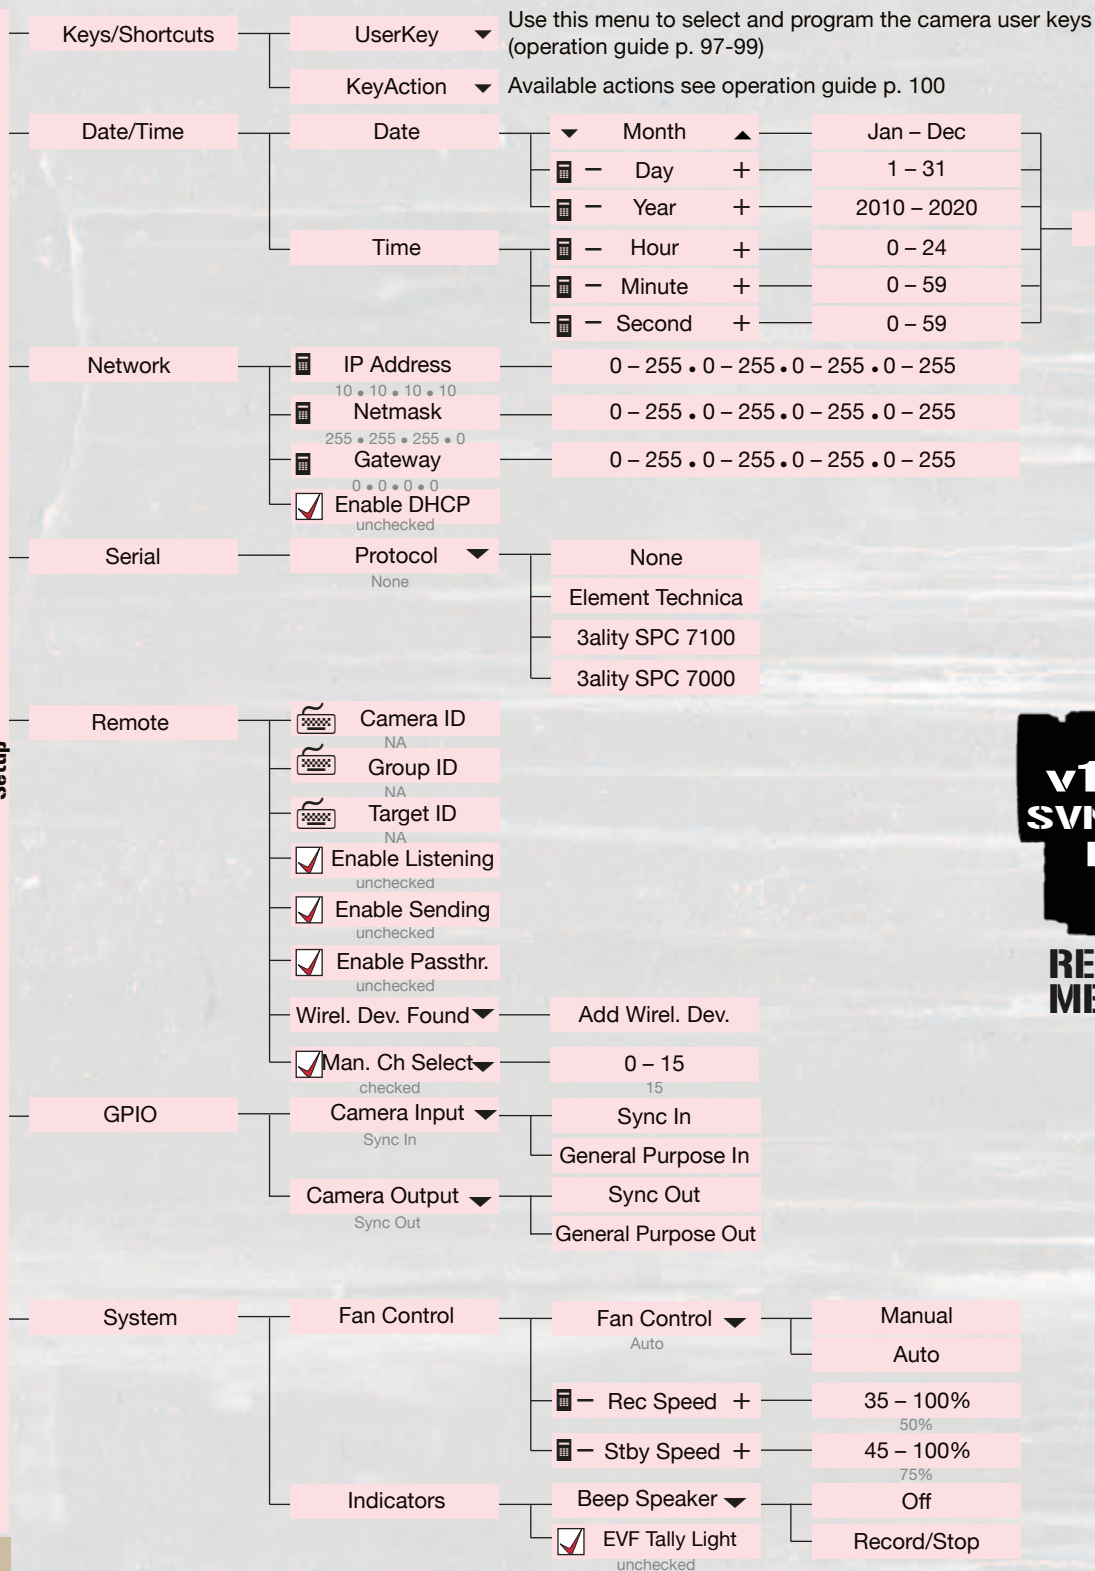

v1.6.32
SVN 38889
BETA

RED EPIC
MENU GUIDE

Maintenance

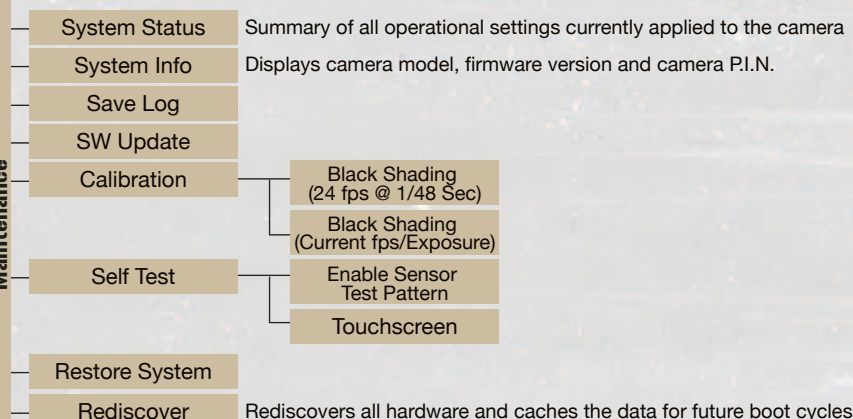

OCTAMAS

Menu Guide OCTAMAS AG Switzerland
mail@octamas.com +41 44 401 58 00
www.octamas.com