

FPS

Basic

1 – 399.60 fps

23.98 fps

Advanced

1 – 400 fps +

23.976 fps

dependent on Resolution & REDCODE settings

ISO

250 – 12800

ISO 800

F-Stop

Basic

Allows adjustment of the aperture,
range depends on attached lens

– Advanced +

Available with RED
EPIC Canon EOS
Mount

Aperture

Enter F-stop directly

Focus

Enter focal distance directly,
range depends on attached lens

1/SEC (Exposure)

Basic

1 sec – 1/8000 sec

1/48 sec

– Advanced +

Exposure

1/48 sec

1 – 1/131579 sec +

Integration Time

20.833 ms

0.007 – 41.706 ms +

Angle*

Absolute Angle 179.820 deg

–1.000–360.000 deg+

* “Relative“ or „Absolute“
dependent on shutter mode

White Balance

Basic

1700 – 10000 K

5600K

Advanced

Preset

Daylight

Incandescent (2800K)

Tungsten (3200K)

Flourescent (4500K)

Flash (5500K)

Daylight (5600K)

Cloudy (7500K)

Shade (9000K)

Apply Preset

Color Temp.

5600 K

1700 – 10000K +

Tint

0

–100.000 – 100.000 +

Calc White Balance

Resolution

5K

5K 2:1

5120 x 2700

5K 2:1

5120 x 2560

5K WS

5120 x 2160

5K HD

4800 x 2700

5K Ana

3600 x 2700

4K

4096 x 2160

4K WS

4096 x 1708

4K HD

3840 x 2160

3K

3072 x 1620

3K WS

3072 x 1284

3K HD

2880 x 1620

2K

2048 x 1080

2K WS

2048 x 854

2K HD

1920 x 1080

1K WS

1280 x 480

1K HD

1280 x 720

REDCODE

3:1 – 18:1

8:1

dependent on Resolution & fps

RED EPIC
MENU GUIDE

OCTAMAS

Menu Guide OCTAMAS AG Switzerland
mail@octamas.com +41 44 401 58 00
www.octamas.com

LEGEND

Lorem ipsum



Are default values

Playback



Exit Playback

Touch this menu icon to enter the
Secondary Menus / to return to settings menu
Touch and hold to lock the touchscreen

Advanced

Touch and hold or double-click on an icon
to bring up an advanced interface display

Keypad for entering information directly



Keyboard for entering information directly



Slider to adjust levels



Touch and hold to unlock the touchscreen

HDR

Off

Off

HDRx

Stops

1 - 6

2

Focus

Mode

Manual

Manual

Confirm

Single

Continuous

Touch Track

Rack

Available with RED EPIC
Canon EOS Mount

Zones

Spot

Center

Spot



Enhanced A/F

unchecked

Monitor

Brain HDMI

Brain HDMI

Brain HD-SDI

Frequency

60 Hz

60 Hz

Confirm Style

Circle

None

Circle

Bar

Pie

Not Implemented at this time

Exposure

Camera Preset

Camera

-->

All ->

<--

<- All

S-SSD\presets

Apply

Create



New Name

Display

Key

Look

Project

System

Update...

Delete...

Yes

No

Create

Presets

Looks

Camera

-->

All ->

<--

<- All

S-SSD\looks

Apply

Create

Update

Clone

Delete...

Yes

No

Auto Presets

On Startup

None

On Enter Preview

None

On Enter Playback

None

None

Def. Display Settings (RED)

Def. Key Mappings (RED)

Def. Look Settings (RED)

Def. Project Settings (RED)

Def. System Settings (RED)

Front Rotary Alternate (RED)

Front Rotary Default (RED)




RED EPIC
MENU GUIDE

OCTAMAS


Menu Guide OCTAMAS AG Switzerland
mail@octamas.com +41 44 401 58 00
www.octamas.com

Media

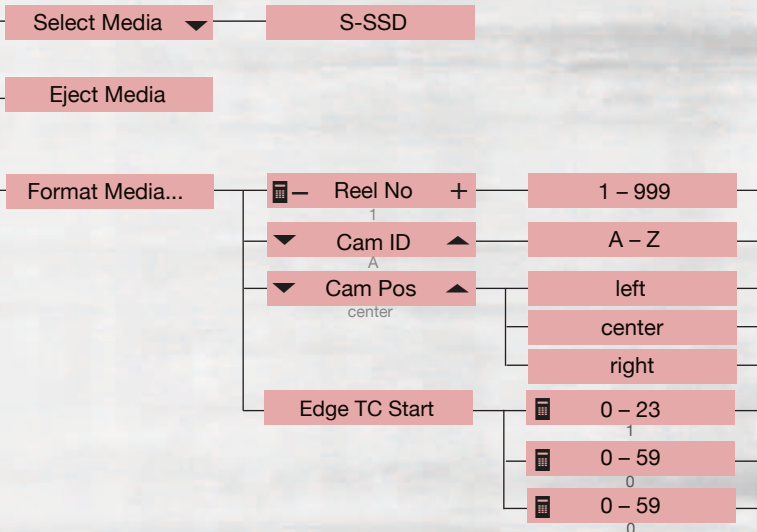


RED EPIC MENU GUIDE

Settings

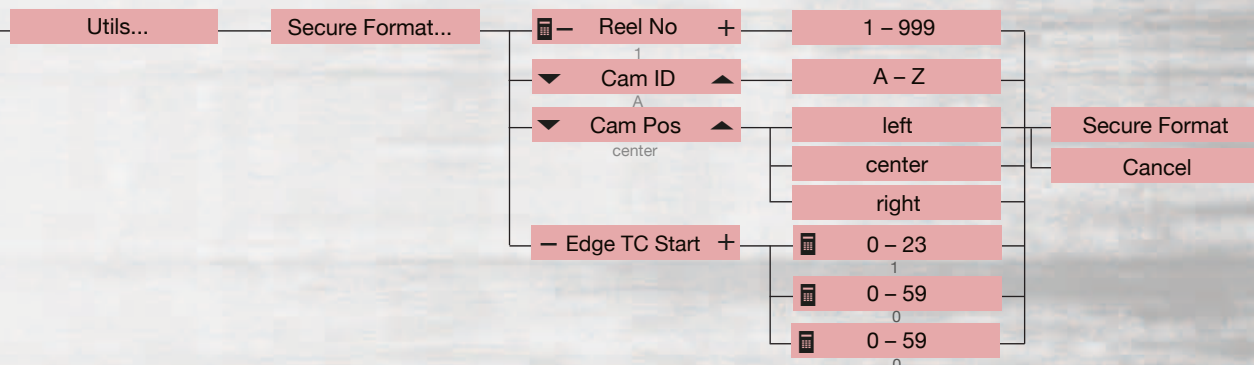


Settings see next pages

Power

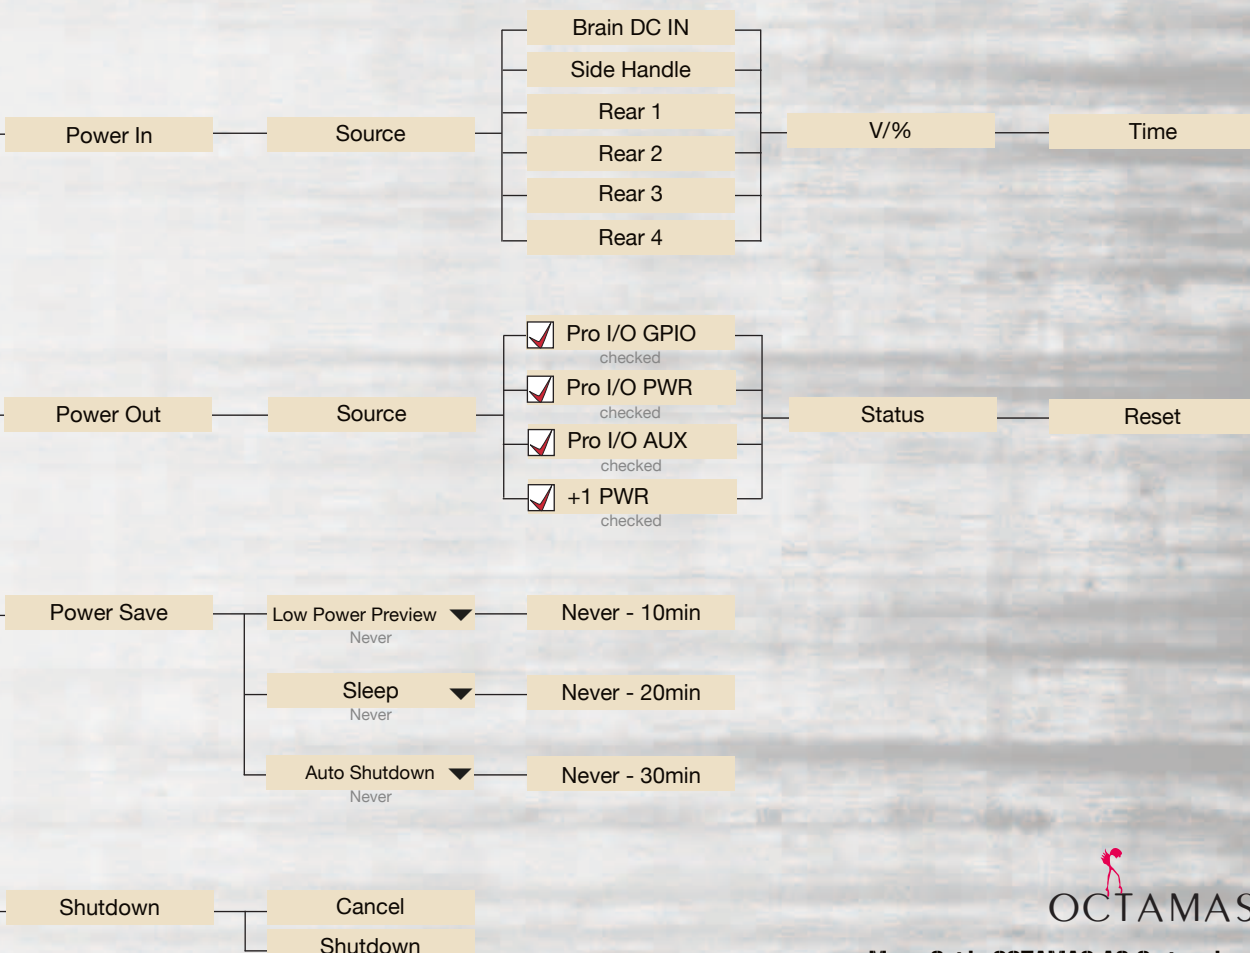

Settings

Display

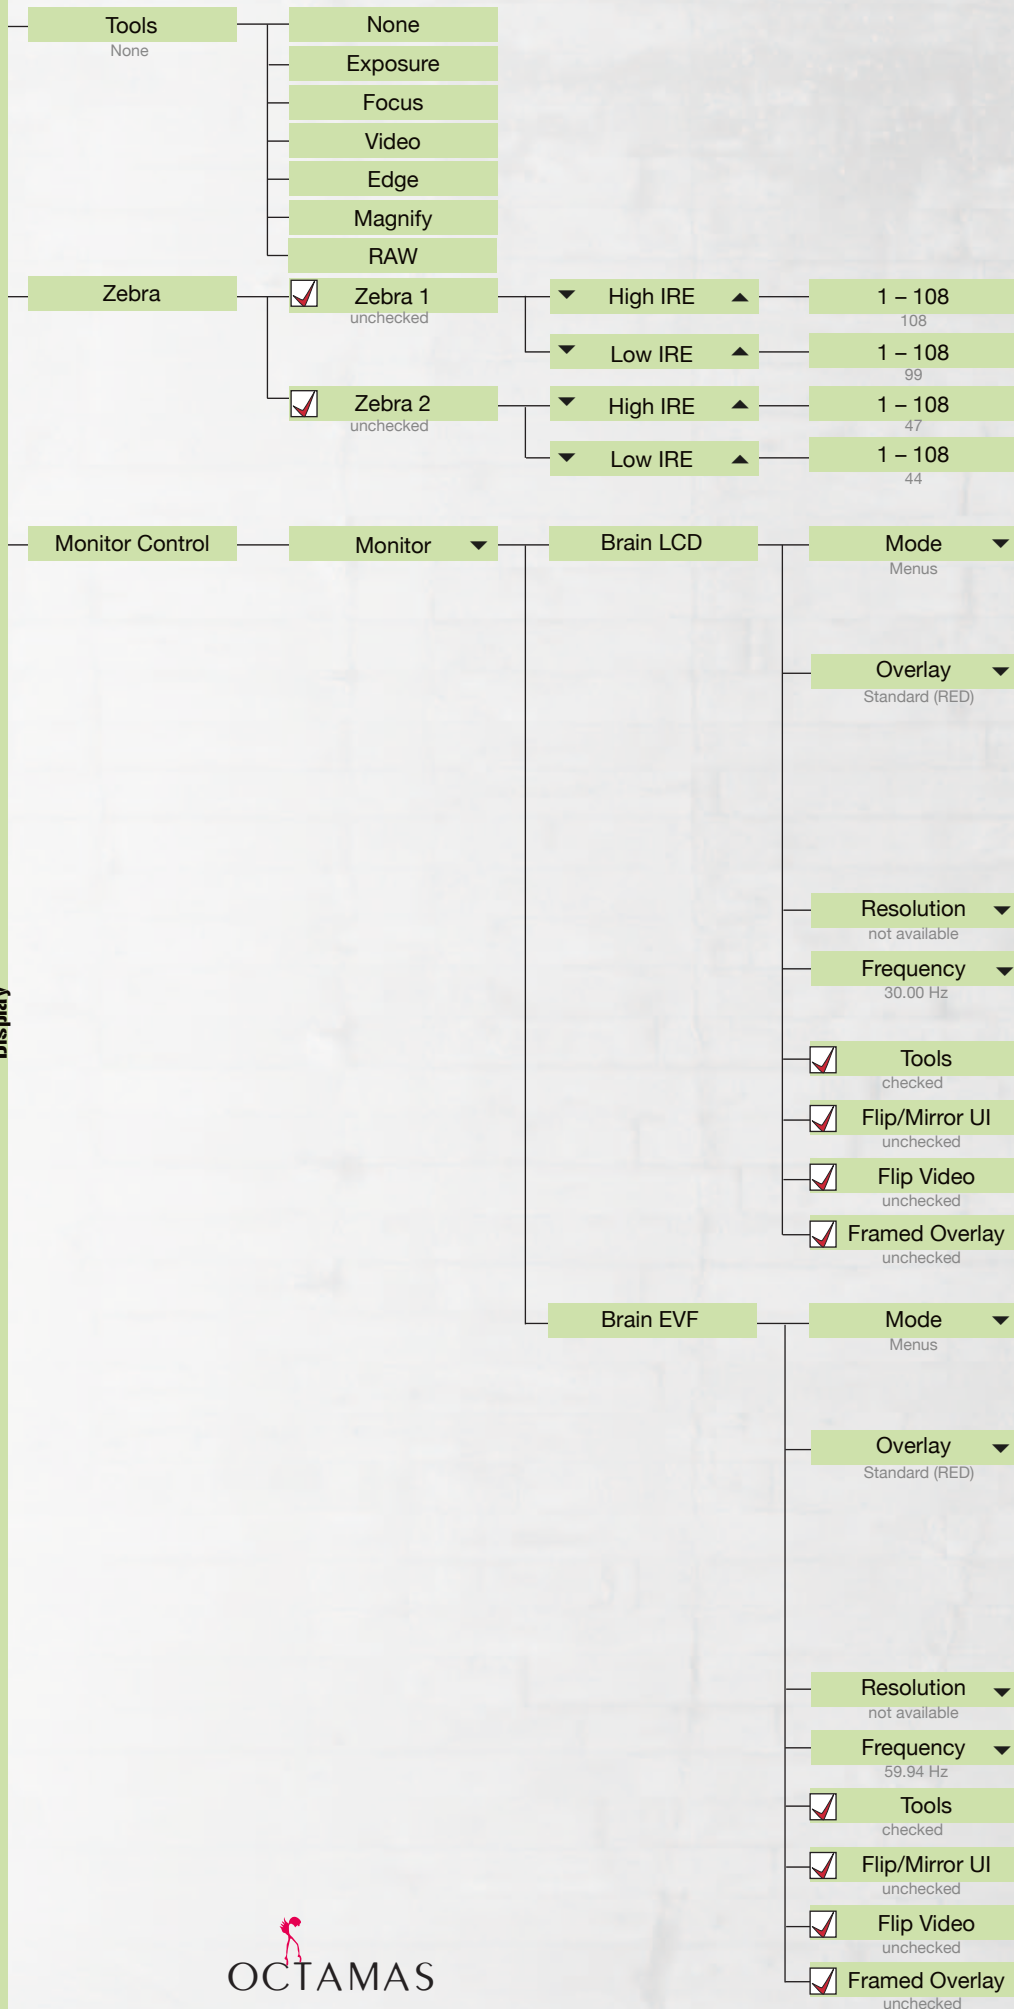


RED EPIC
MENU GUIDE



Settings

Display

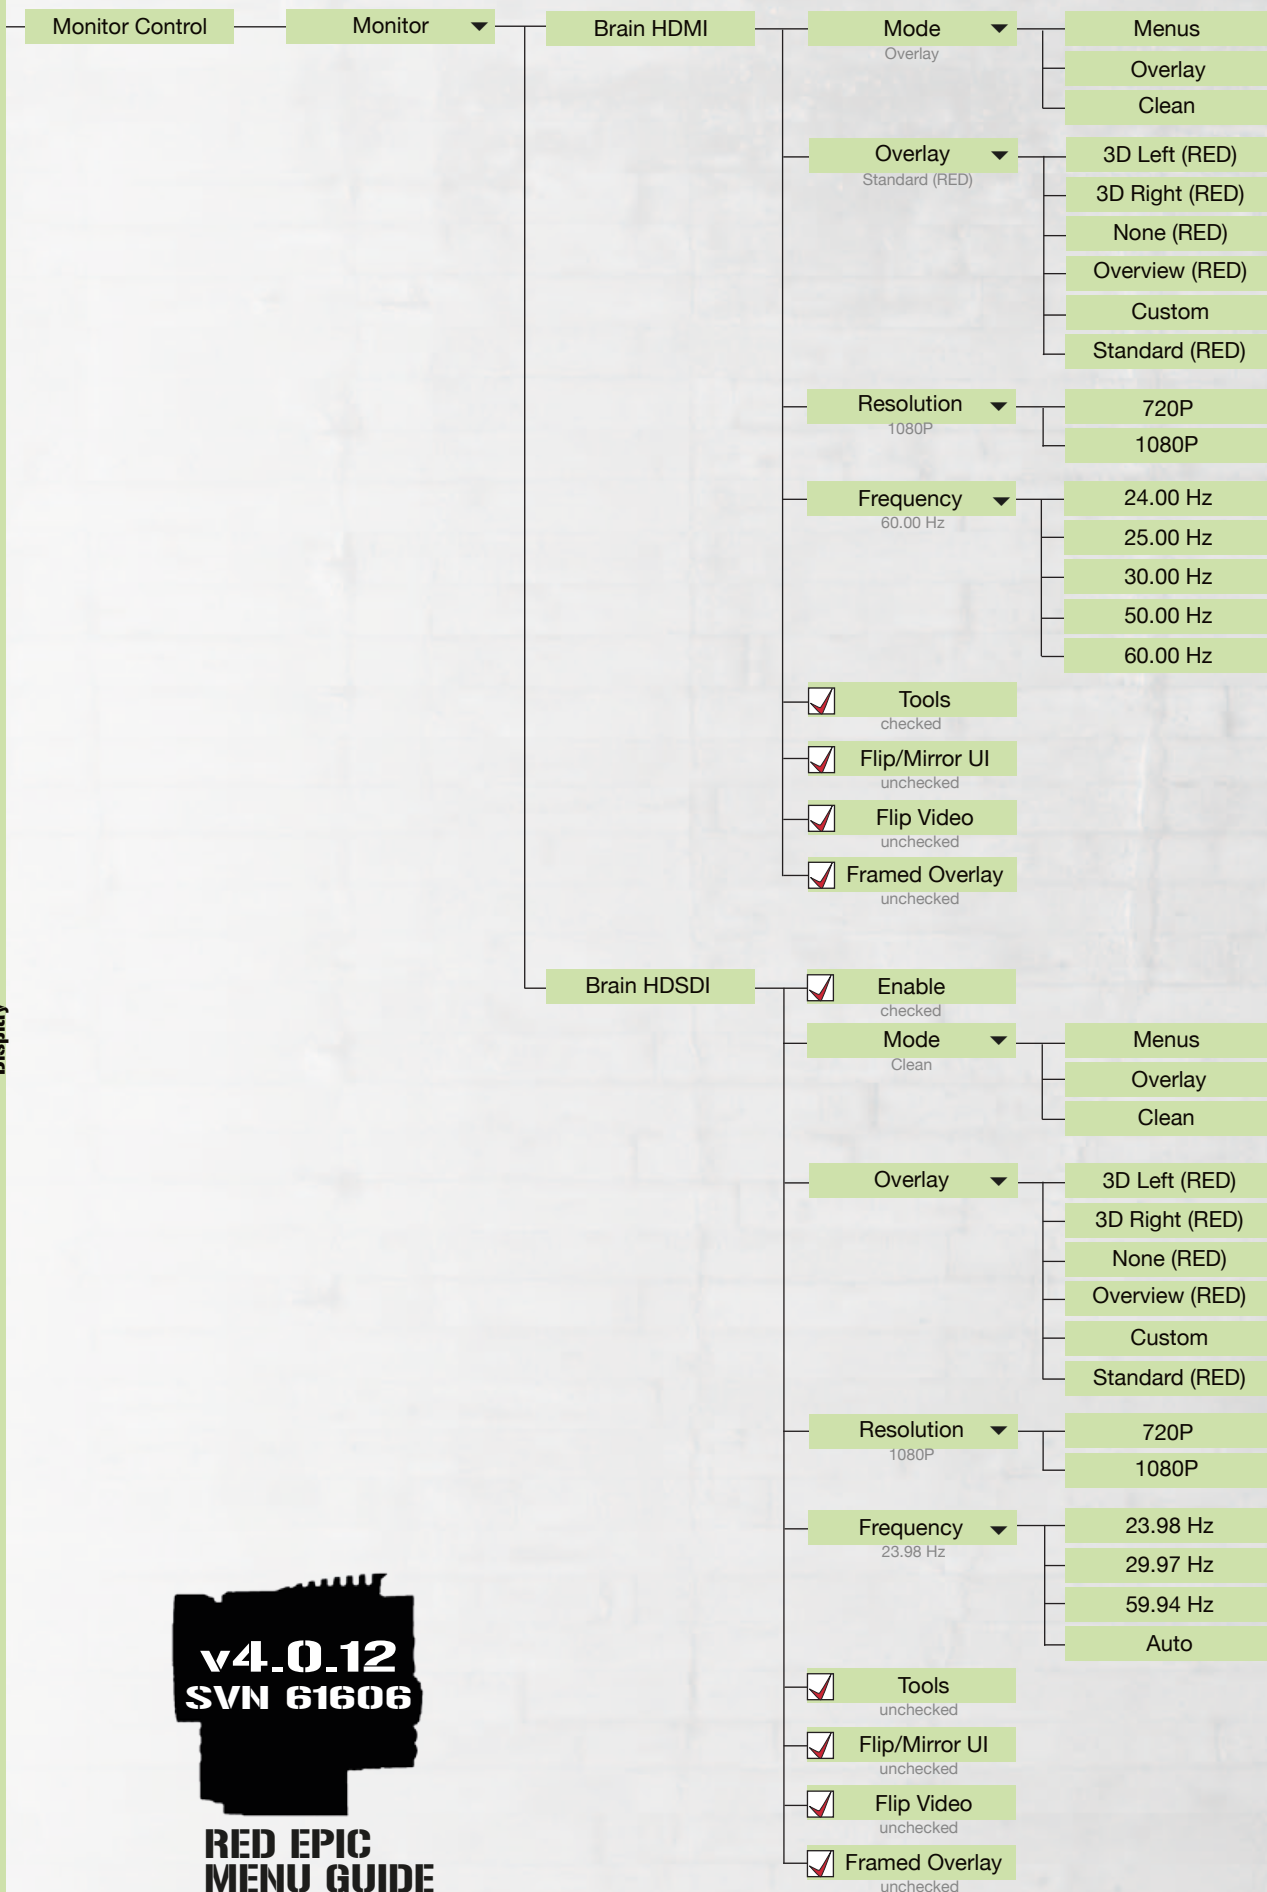


RED EPIC
MENU GUIDE

OCTAMAS

Settings

Display

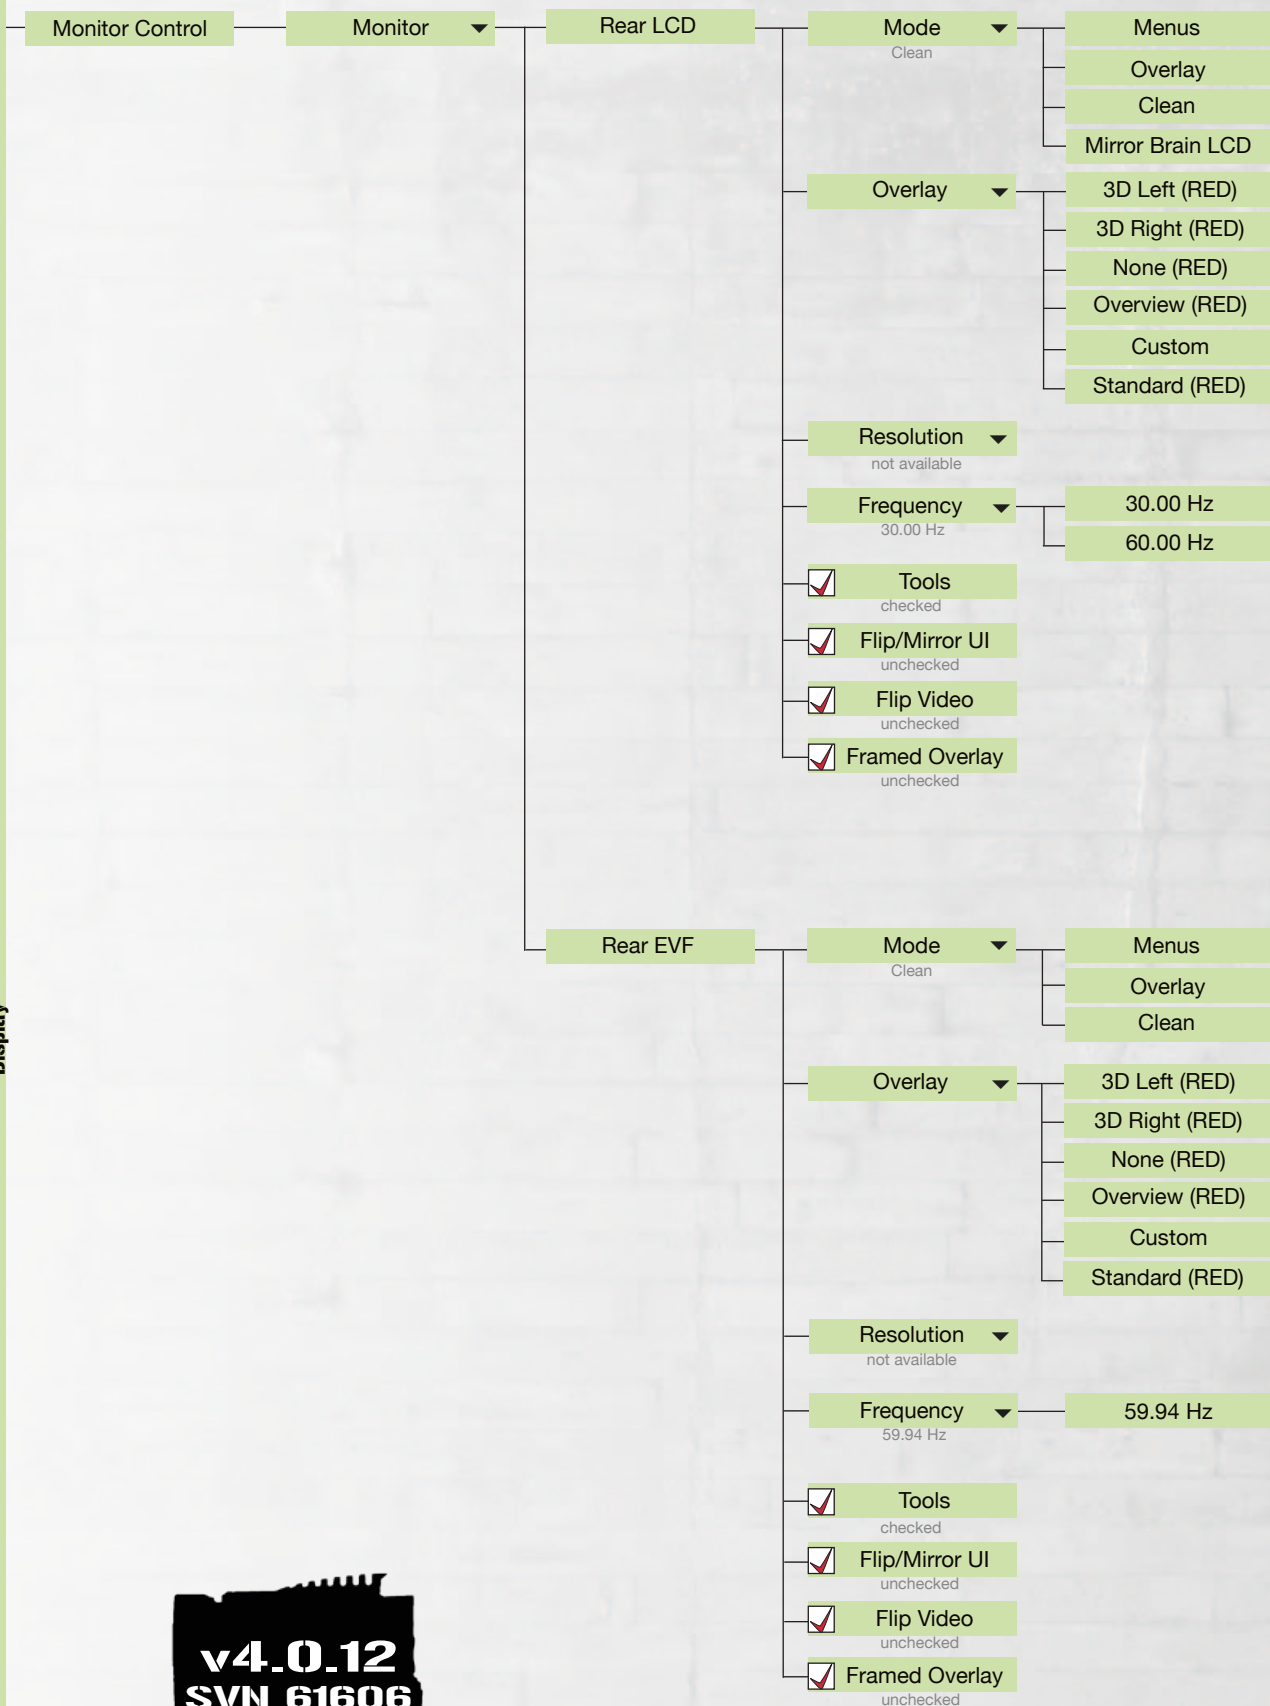

RED EPIC
MENU GUIDE




Settings

Display

v4.0.12
SVN 61606


RED EPIC
MENU GUIDE

OCTAMAS
Menu Guide OCTAMAS AG Switzerland
mail@octamas.com +41 44 401 58 00
www.octamas.com

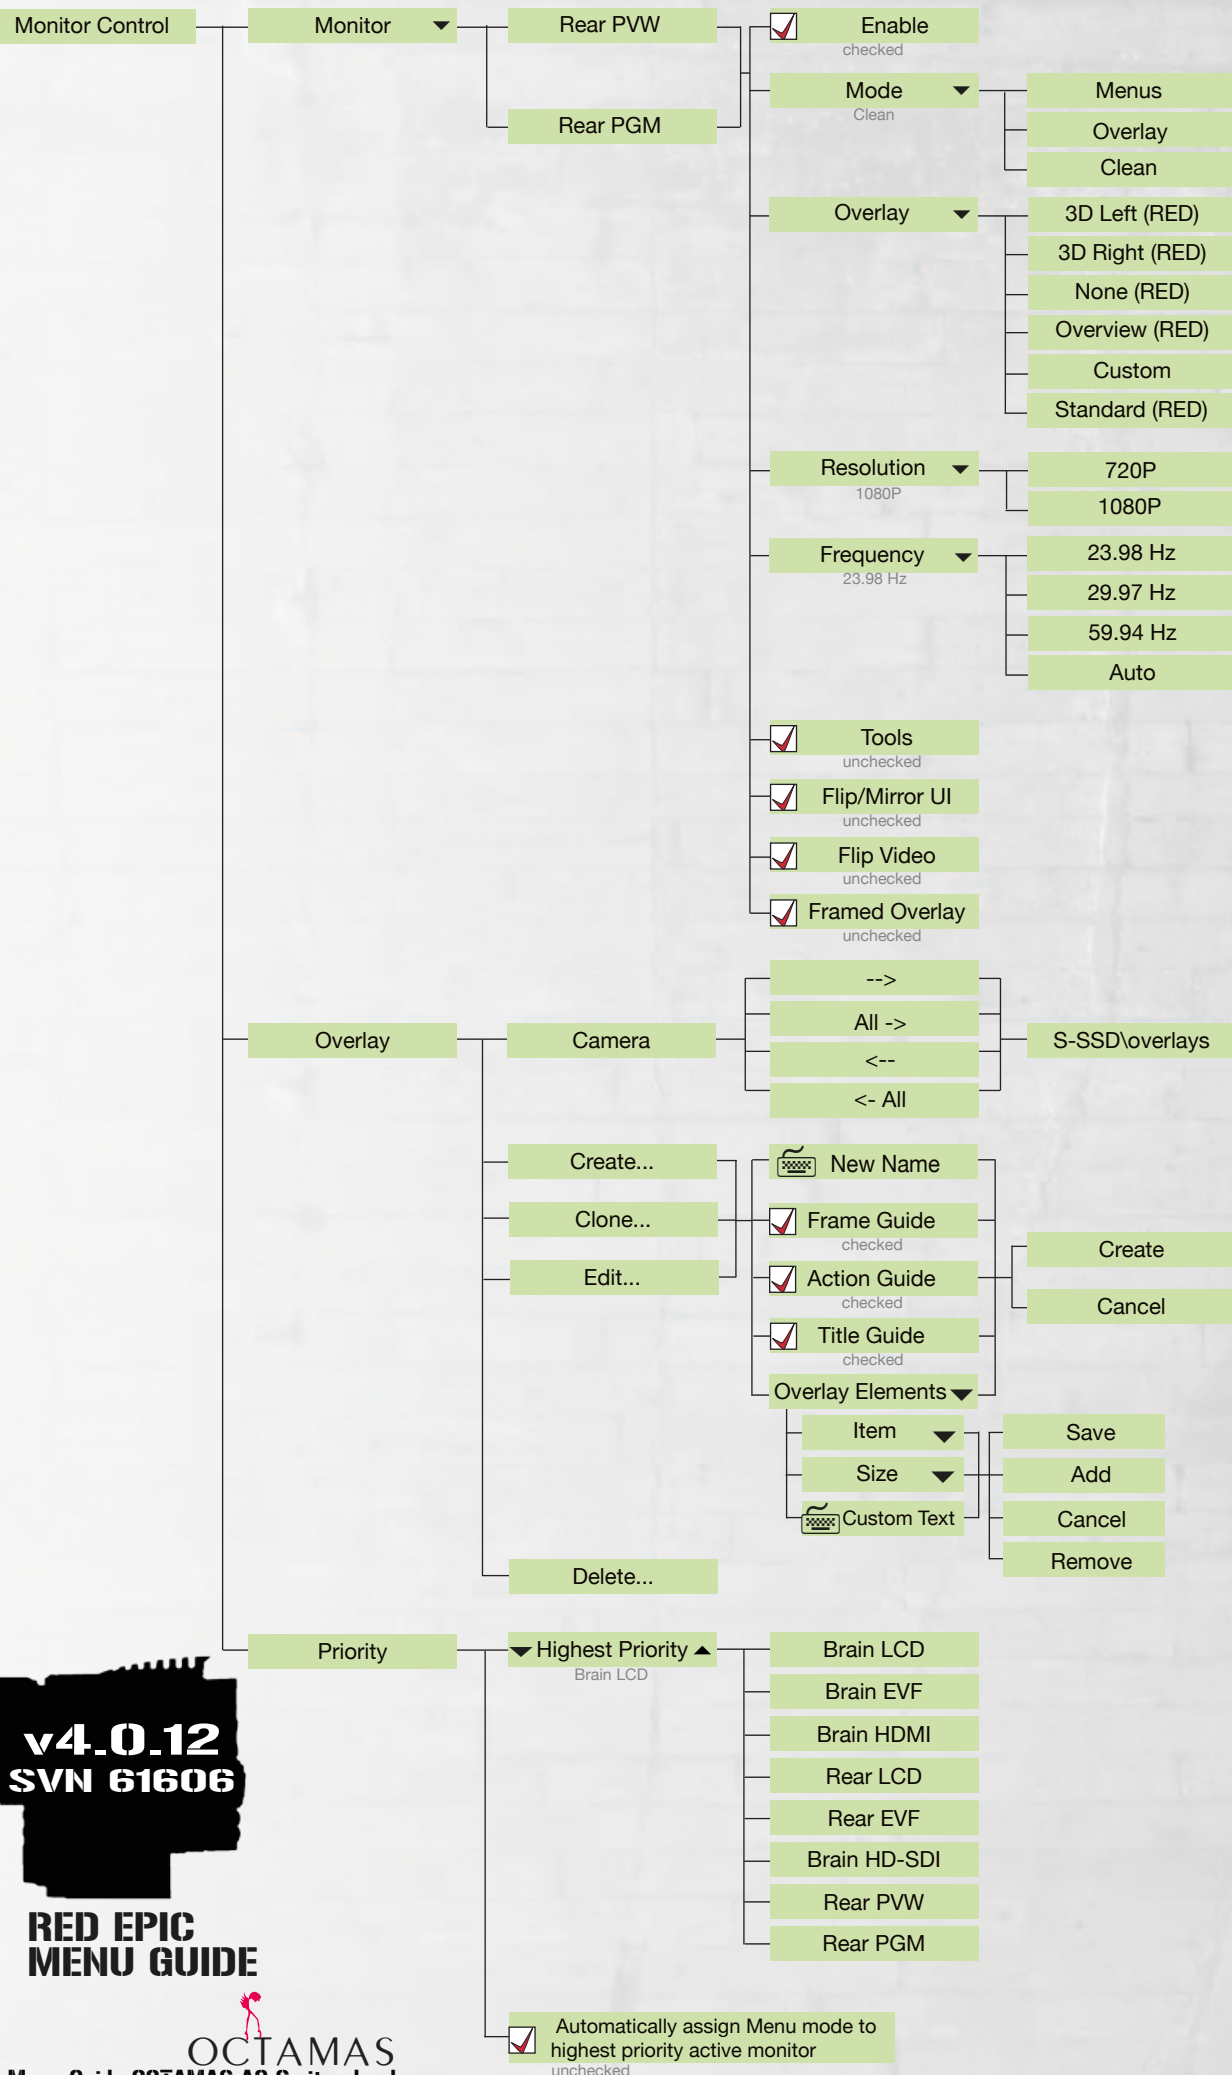

Settings

Display

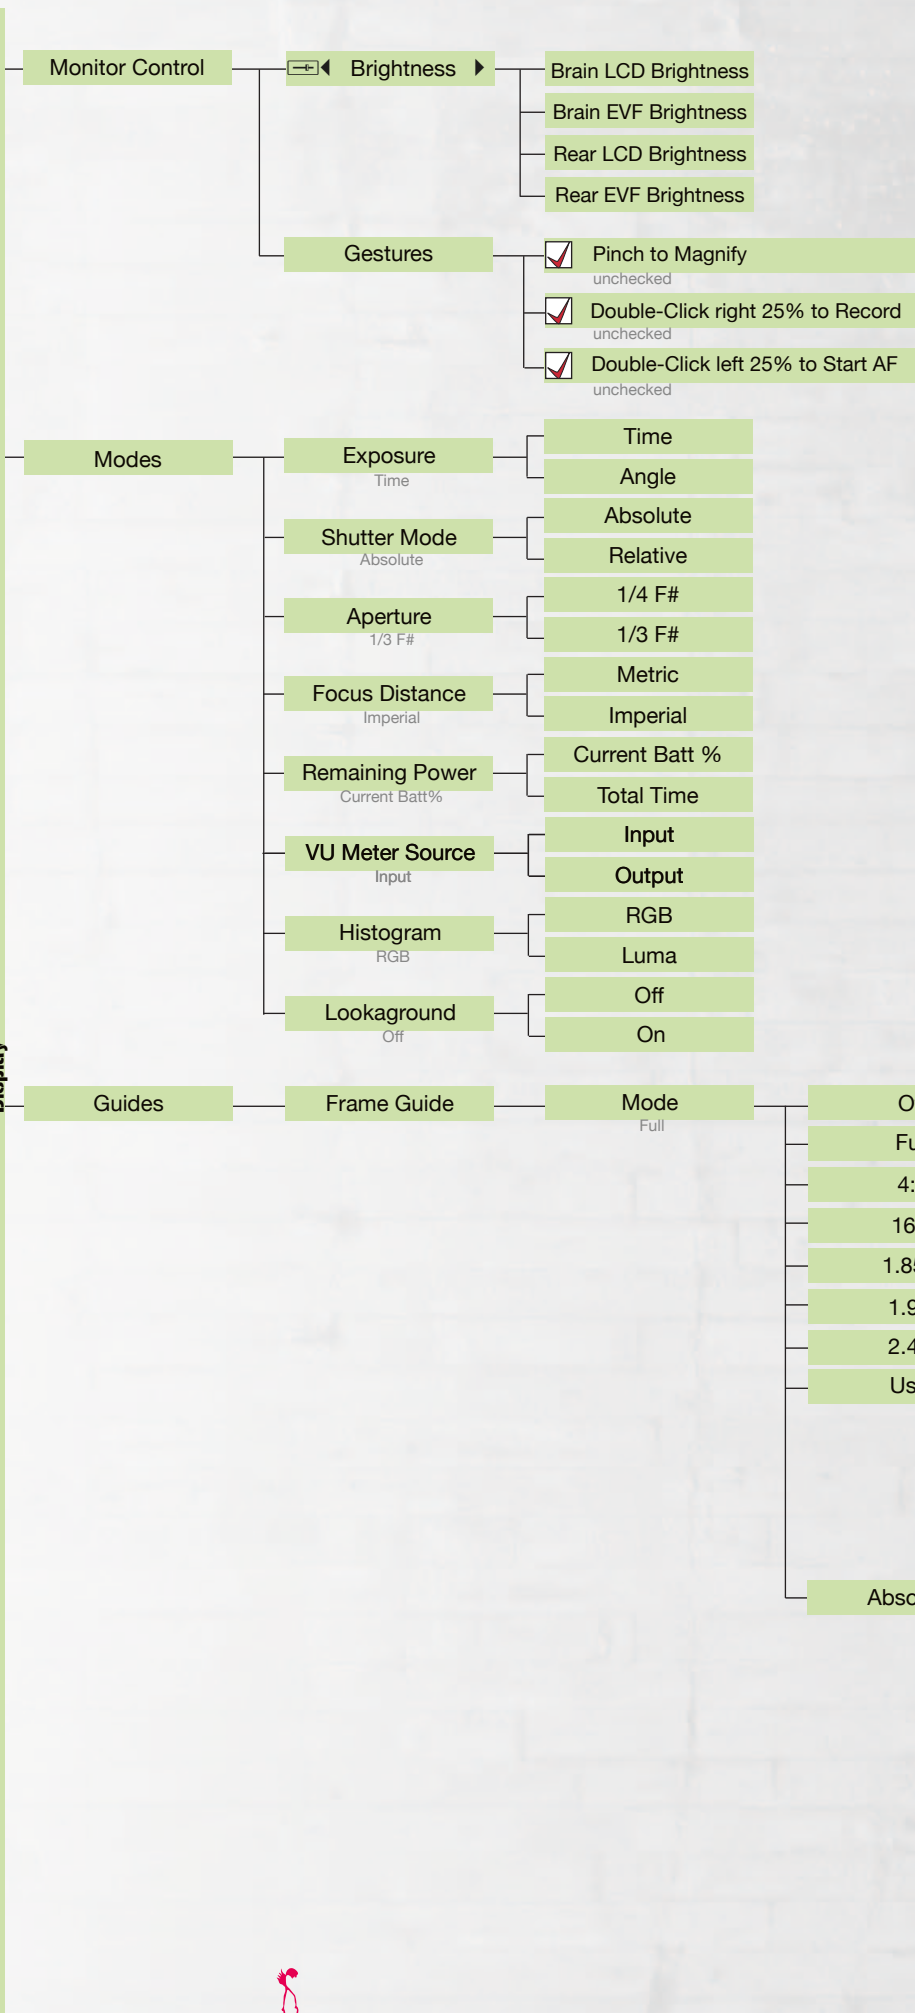

RED EPIC
MENU GUIDE



Settings

Display

Guides

Action Guide

Mode

Off

Off

Full

4:3

16:9

1.85:1

1.9:1

2.4:1

User

Scale

95.00%

0-100.00% +

Offset X/Y

0.00%, 0.00%

0-100.00% +

0-100.00% +

Apperance

Bracket, 50%

Solid

Dashed

Bracket

25%, 50%, 75%, 100%

Relative to Frame Guide
checked

Absolute

Width/Height

4864px, 2026px

-9999-9999px +

-9999-9999px +

Offset X/Y

0px, 0px

-9999-9999px +

-9999-9999px +

Apperance

Bracket, 50%

Solid

Dashed

Bracket

25%, 50%, 75%, 100%

Title Guide

Mode

Off

Off

Full

4:3

16:9

1.85:1

1.9:1

2.4:1

User

Scale

90.00%

0-100.00%

Offset X/Y

0.00%, 0.00%

0-100.00% +

0-100.00% +

Apperance

Bracket, 50%

Solid

Dashed

Bracket

25%, 50%, 75%, 100%

Relative to Frame Guide
checked

Absolute

Width/Height

4608px, 1920px

-9999-9999px +

-9999-9999px +

Offset X/Y

0px, 0px

-9999-9999px +

-9999-9999px +

Apperance

Bracket, 50%

Solid

Dashed

Bracket

25%, 50%, 75%, 100%



RED EPIC
MENU GUIDE

OCTAMAS

Menu Guide OCTAMAS AG Switzerland
mail@octamas.com +41 44 401 58 00
www.octamas.com

Settings




Display



**RED EPIC
MENU GUIDE**

Settings


Look

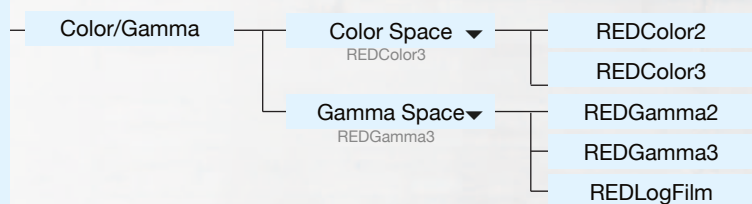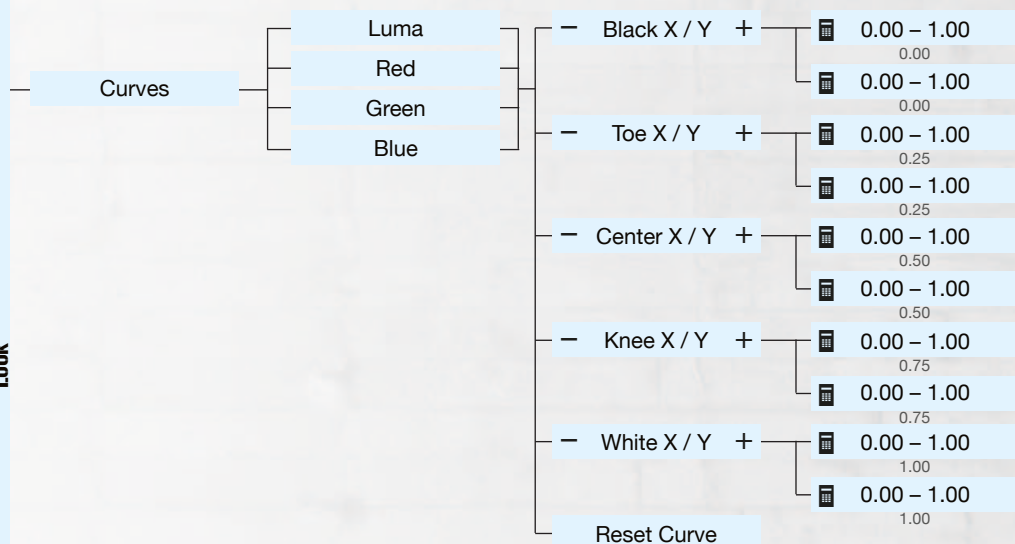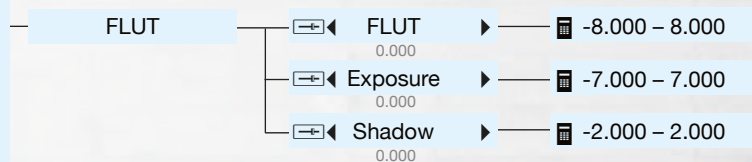

RED EPIC
MENU GUIDE


Settings

Project

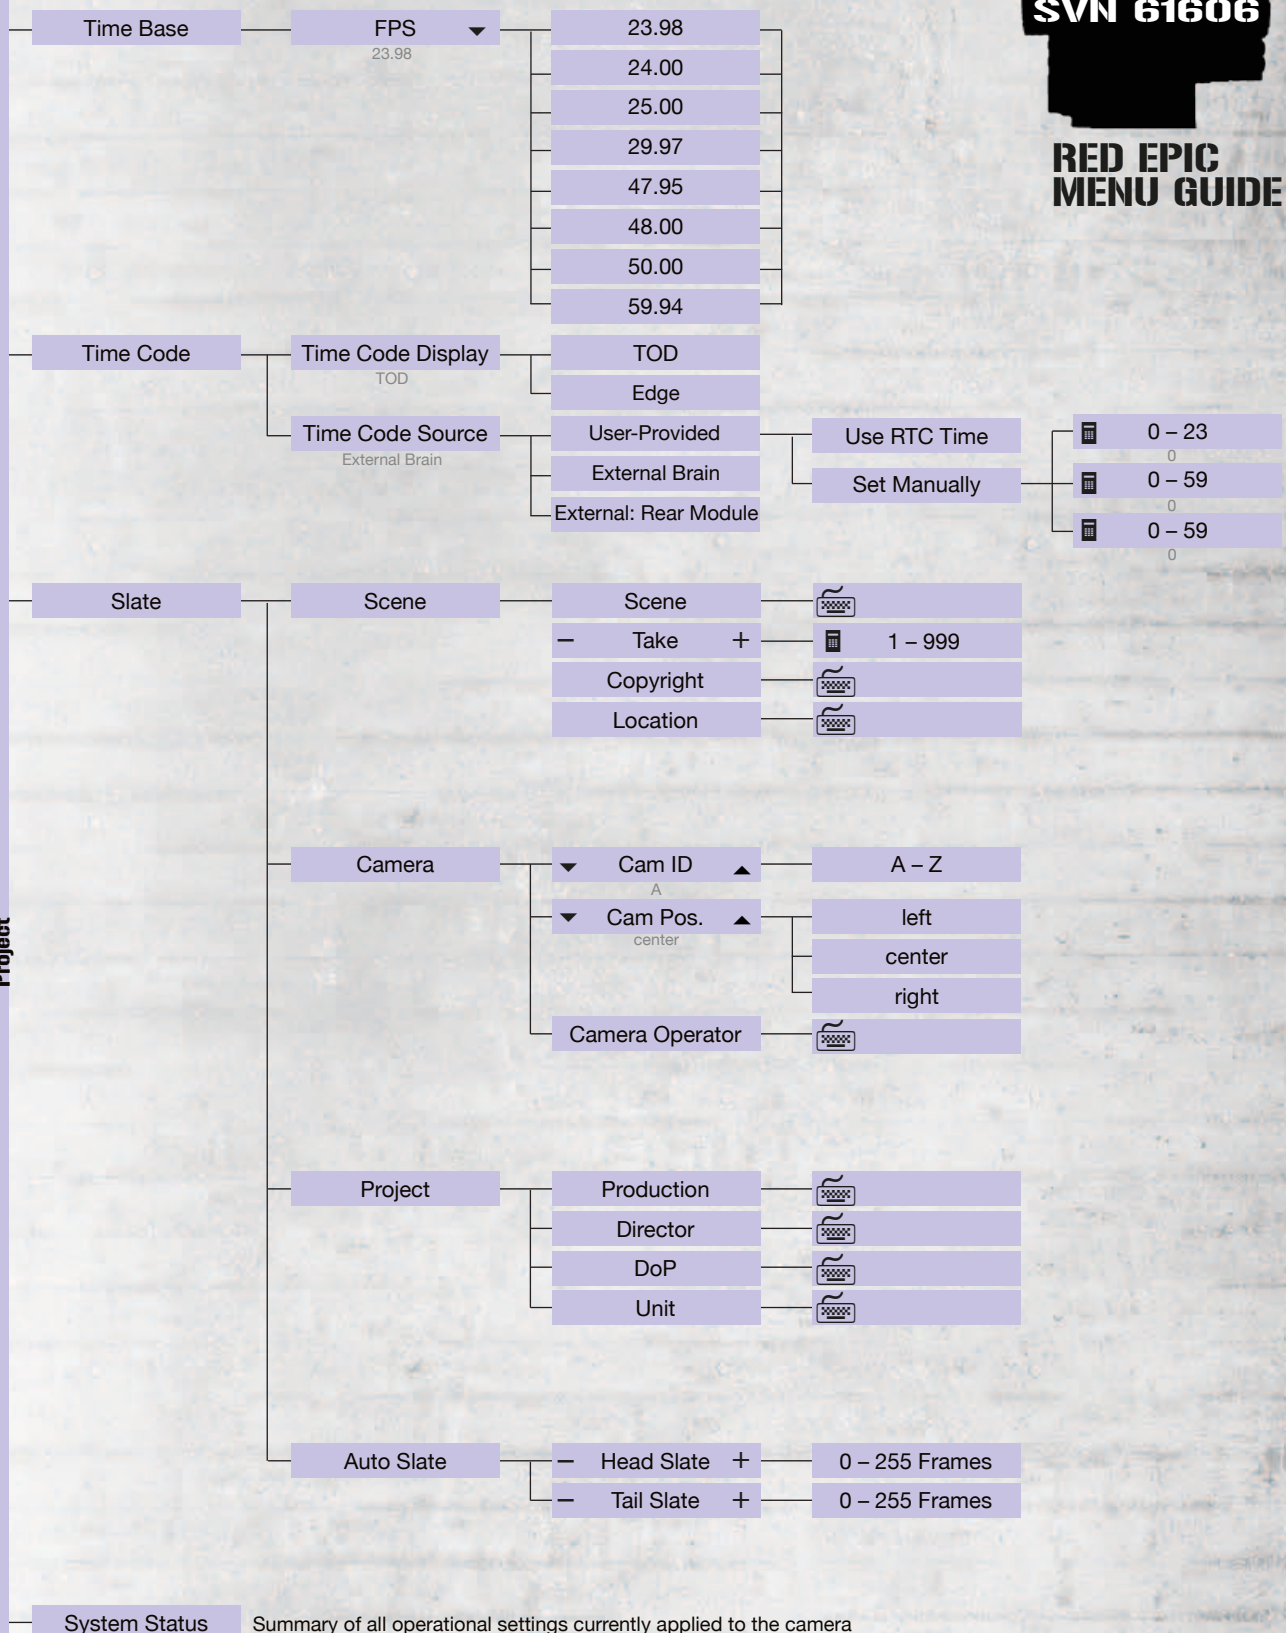


Settings

Audio

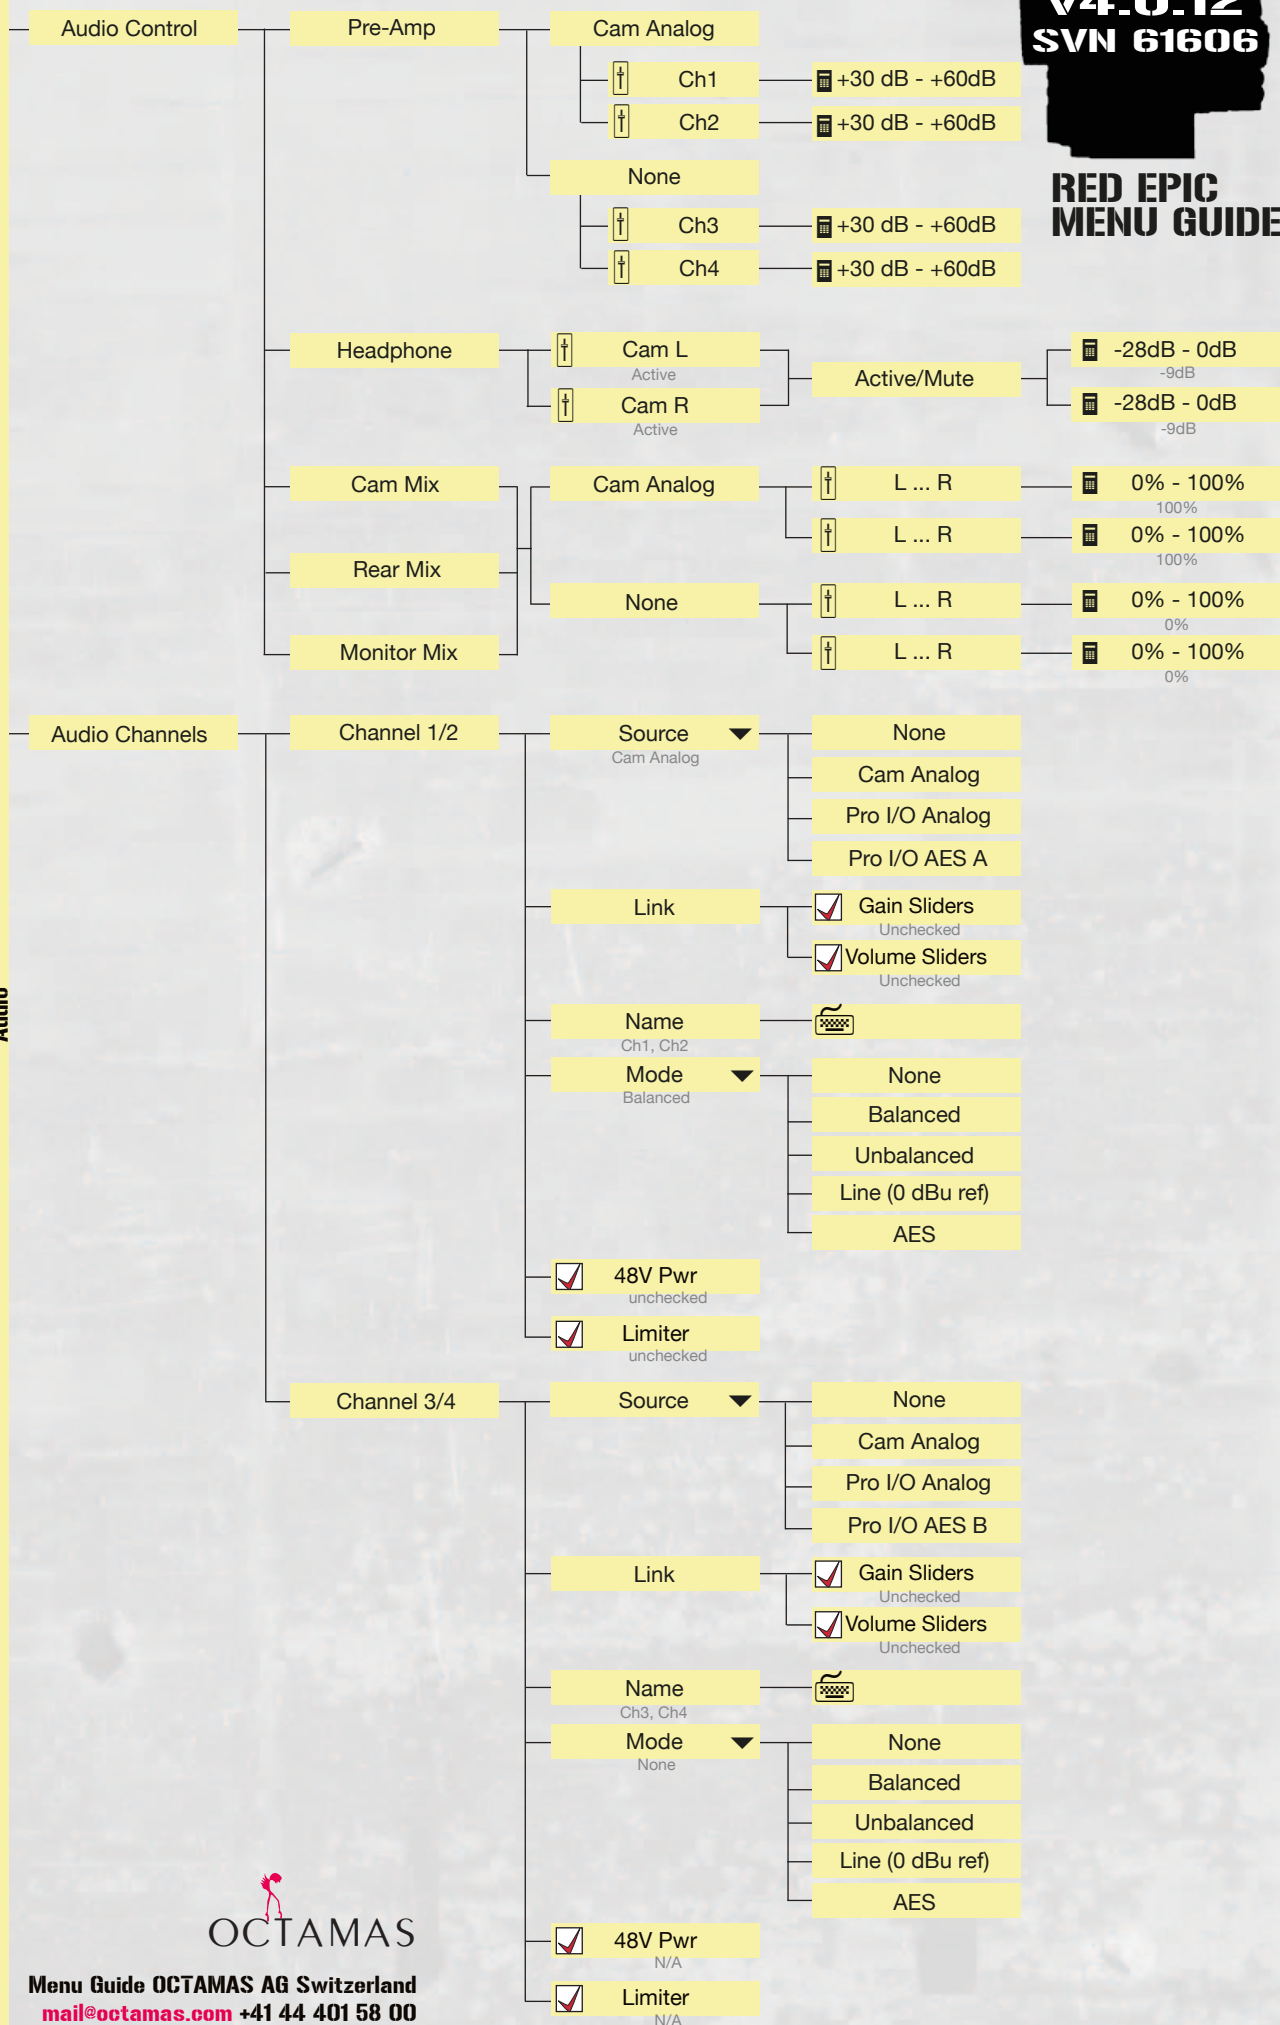

Settings

Recording



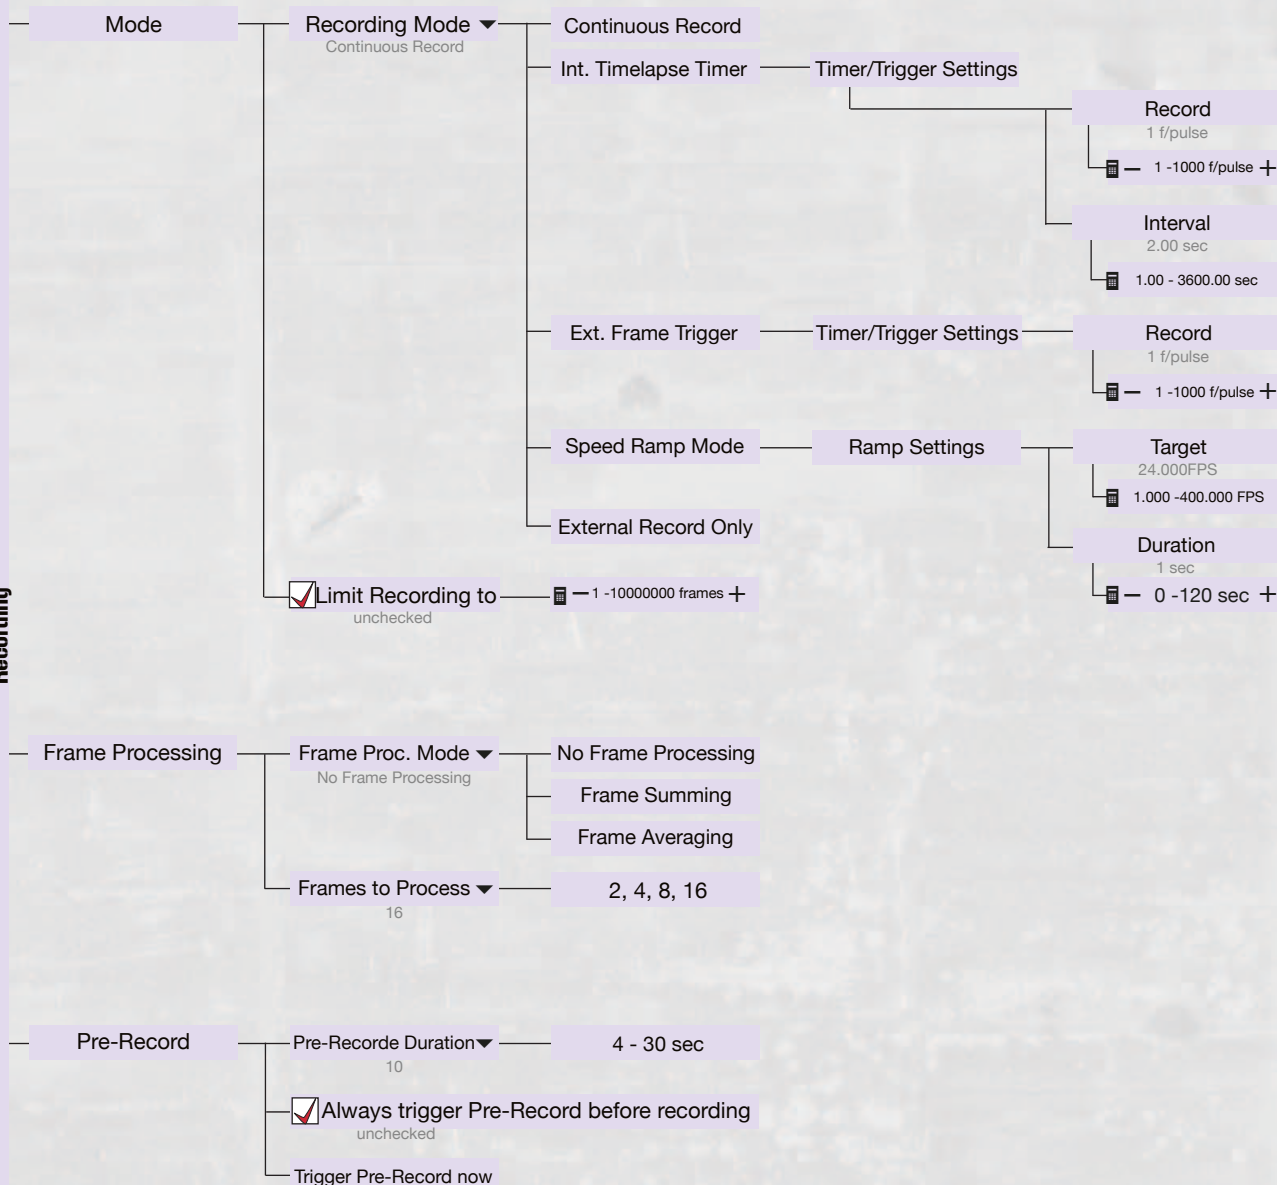



RED EPIC
MENU GUIDE



Settings

Setup

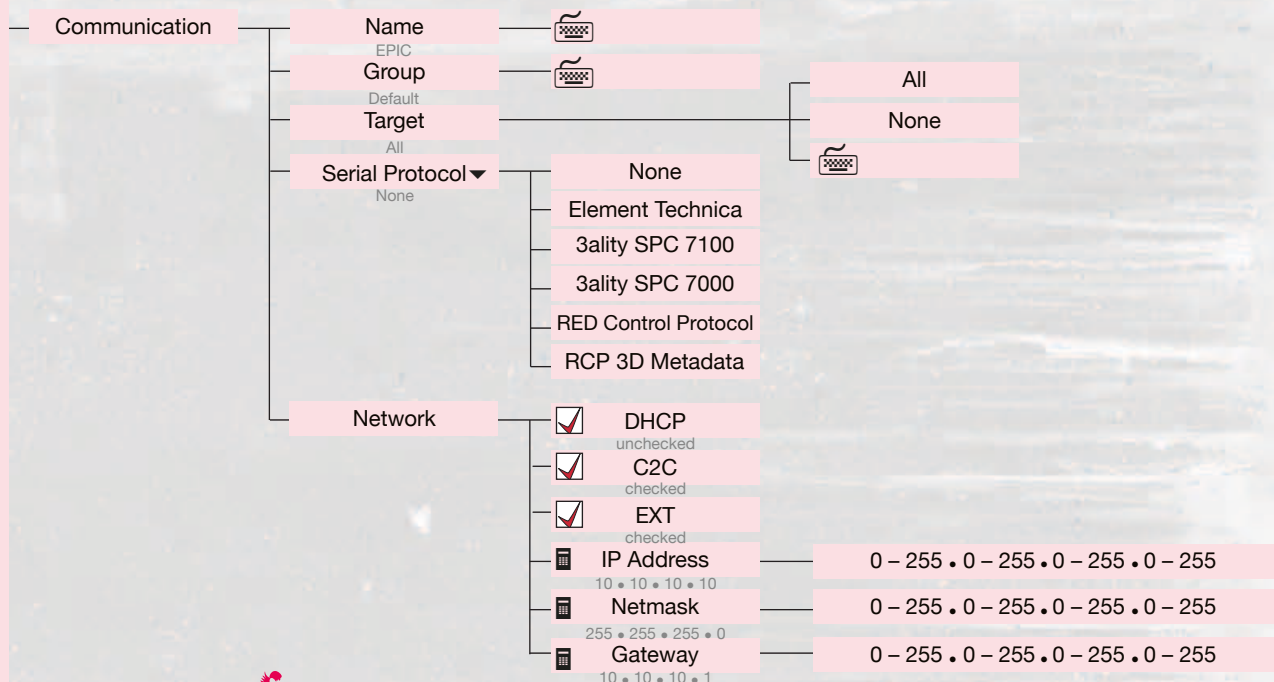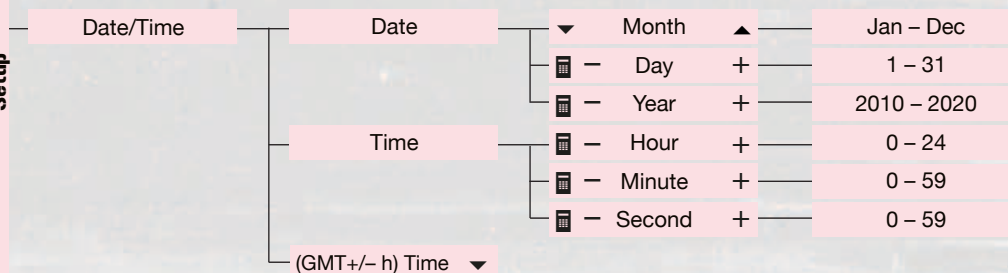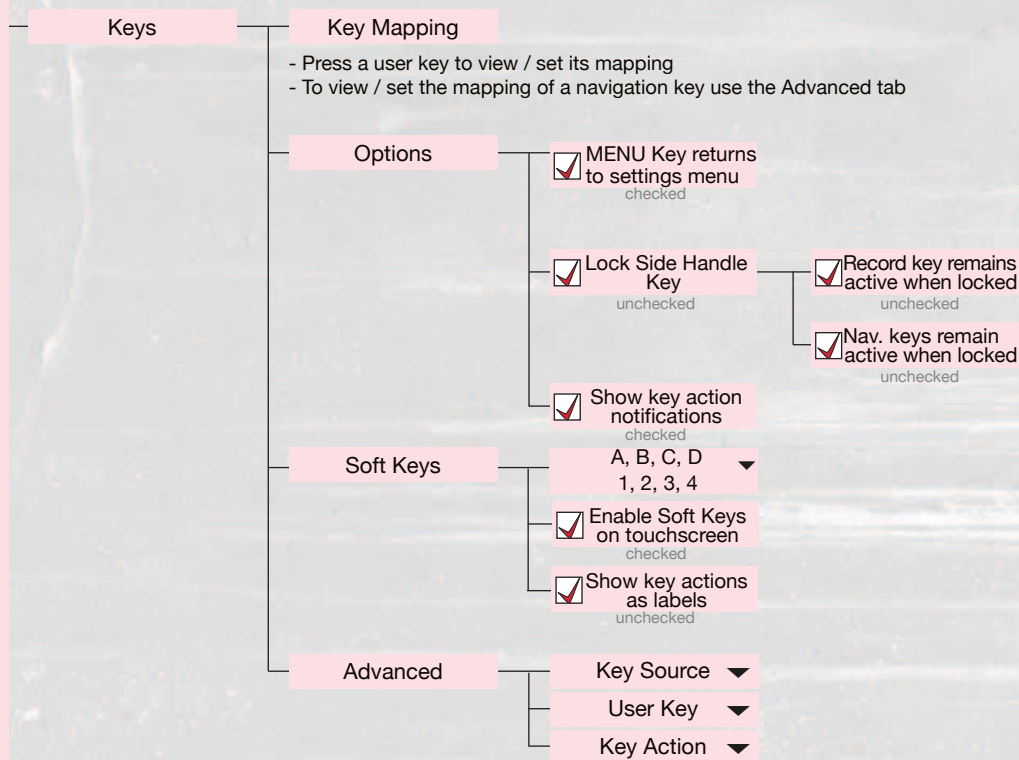


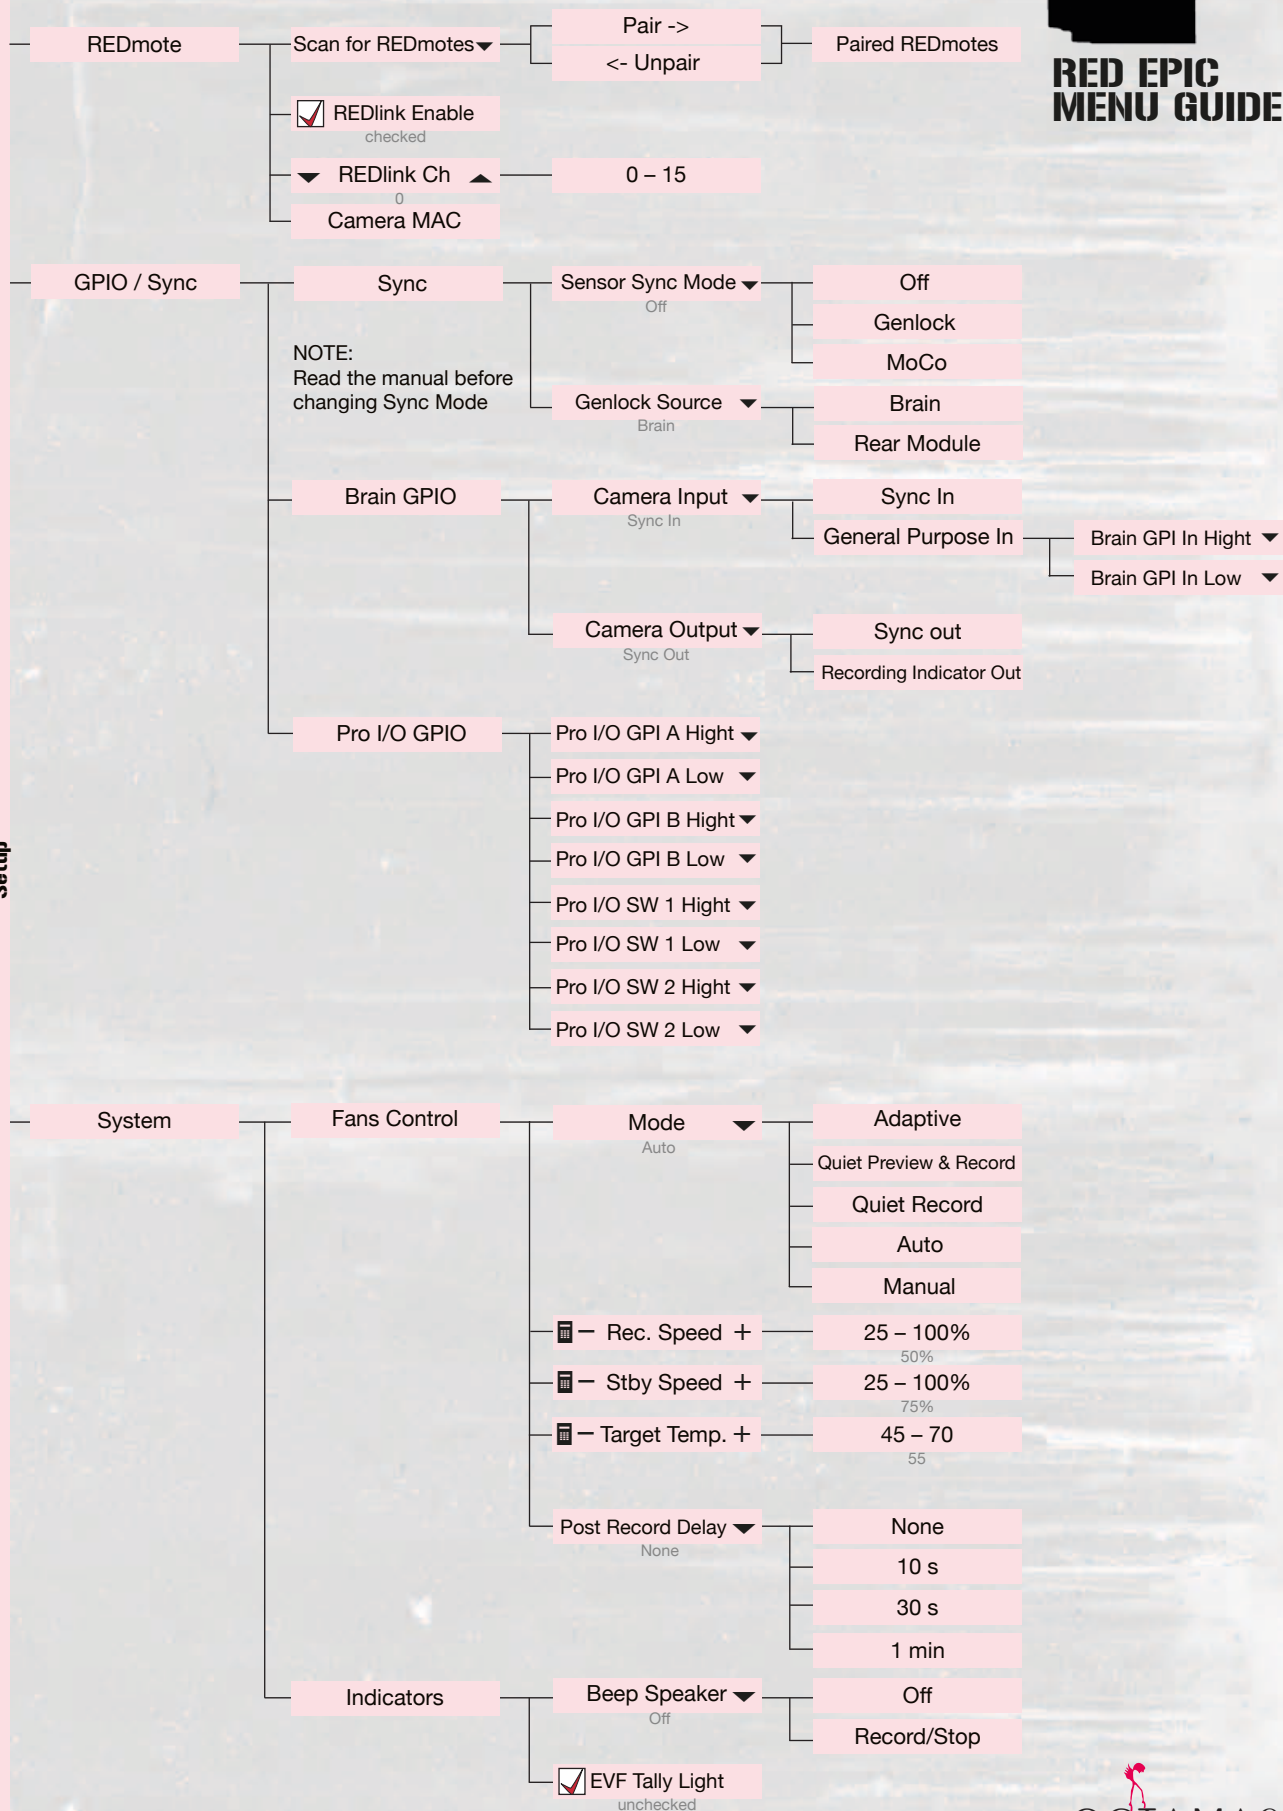

Settings

Maintenance

Playback

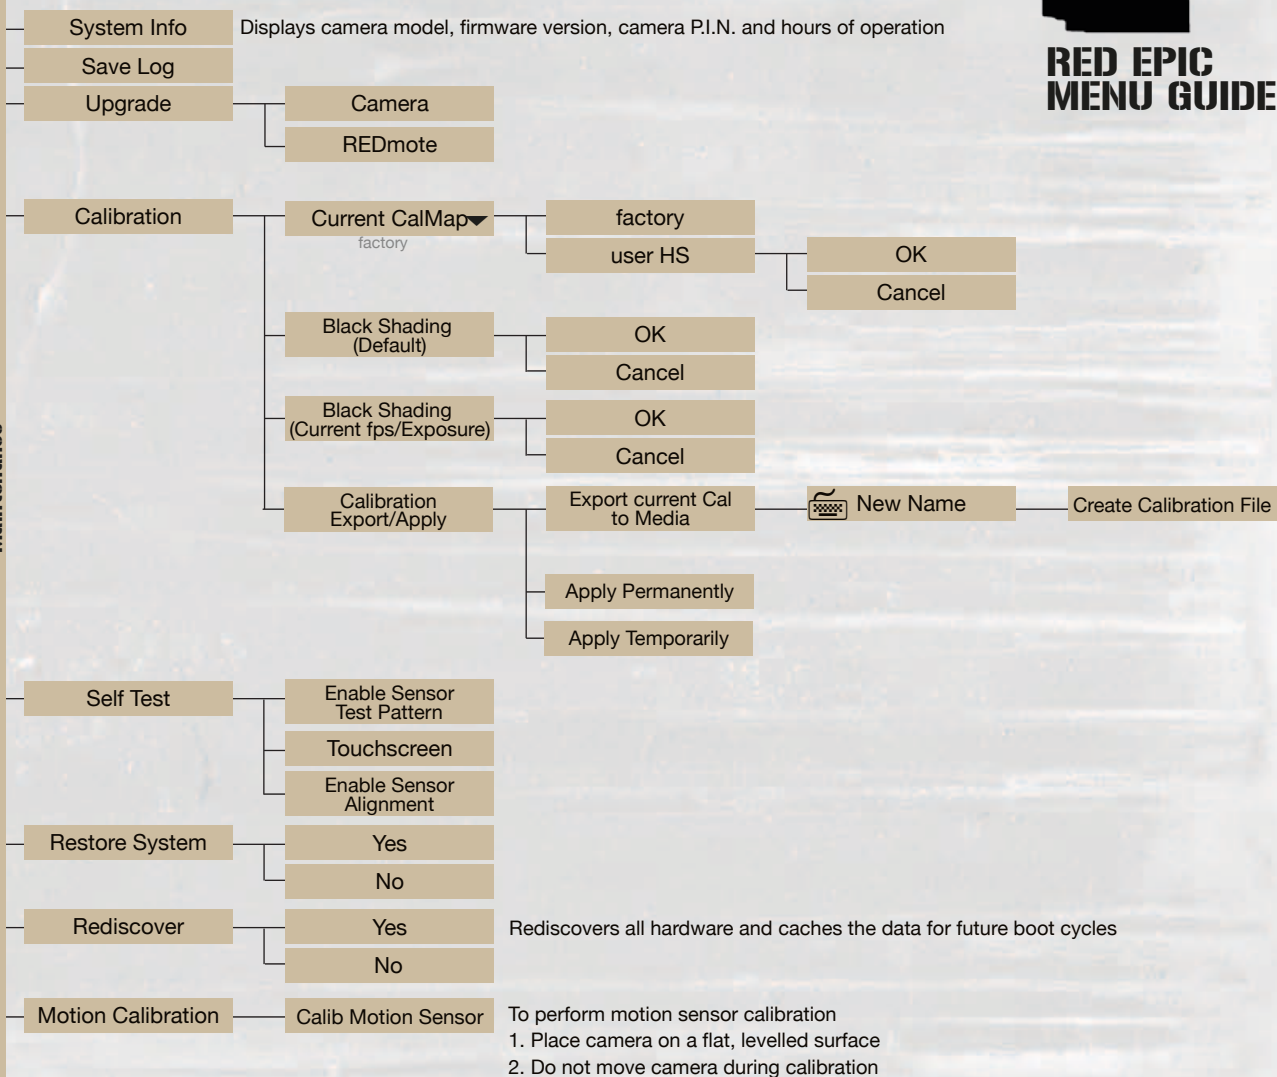

Allows you to view clips and also allows you to change the look of the playback clips, see operation guide p. 132 - 140

LEGEND

- ▶ Playback
- Exit Playback
- x1 Playback Speed
- ⋯ In Point Marker
- ◀ Frame-by-frame reverse
- ▶ / II Play / Pause
- ▶ Frame-by-frame forward
- ⋯ Out Point Marker
- I / ↺ Play once / Loop
- / ← Playback direction



**RED EPIC
MENU GUIDE**

OCTAMAS

Menu Guide OCTAMAS AG Switzerland
 mail@octamas.com +41 44 401 58 00
 www.octamas.com